


Product data sheet

Characteristics

LV848511

MX 2nd opening voltage release - 24 V AC/DC - for MTZ2/MTZ3 drawout

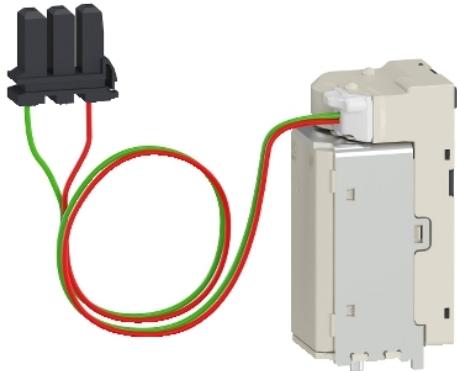

Main

Range	Masterpact
Device short name	Second MX
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MTZ2 circuit-breaker Masterpact MTZ3 circuit-breaker
Voltage release type	Shunt trip release

Complementary

Control type	Standard
[Un] voltage power supply	24...30 V DC 24 V AC 50/60 Hz
Threshold tripping voltage	0.7...1.1 Un on opening
Holding power consumption	4.5 W
Circuit breaker mounting mode	Drawout
Maximum response time	60 ms on opening for Masterpact MTZ2 60 ms on opening for Masterpact MTZ3

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
Circularity Profile	<input checked="" type="checkbox"/> End Of Life Information

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.