


Product data sheet

Characteristics

33658

MX shunt release, ComPact NS630b to NS3200 fixed, MasterPact NT/NW, rated voltage 12 VDC

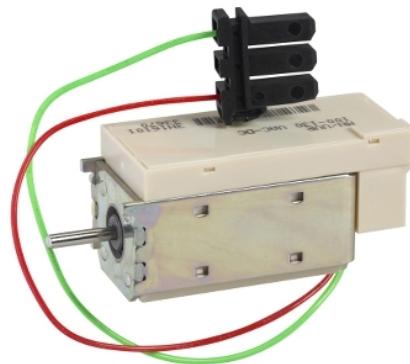

Main

Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact NT Masterpact NW ComPact NS630b...1600 ComPact NS1600b...3200
Voltage release type	Shunt trip release
[Uc] control circuit voltage	12 V DC

Complementary

Threshold tripping voltage	0.7...1.1 x Un
Supply holding power	4.5 W
Mounting mode	Fixed
Response time	50 ms (Compact NS630b...1600) 50 ms (Compact NS1600b...3200) 55 ms (Masterpact NT) 70 ms (Masterpact NW)
Accessory / separate part category	Spare parts for Masterpact NT Spare parts for Masterpact NW Spare parts for Compact NS1600b...3200 Spare parts for Compact NS630b...1600

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	154 g
Package 1 Height	3.5 cm
Package 1 width	6 cm
Package 1 Length	8.3 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	1.604 kg
Package 2 Height	19 cm
Package 2 width	9 cm
Package 2 Length	13 cm
Unit Type of Package 3	S03
Number of Units in Package 3	20
Package 3 Weight	3.695 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

REACH Regulation	 REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------
