


# Product data sheet

## Characteristics

47313

voltage release XF com - 100..130 V DC/AC  
50/60 Hz

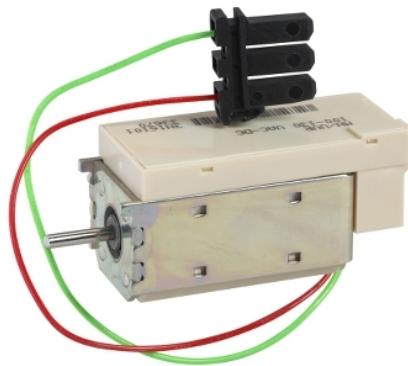

### Main

Device short name	XF com
Product or component type	Voltage release
Device application	Control
Range compatibility	MasterPact NT Masterpact NW
[Uc] control circuit voltage	100...130 V AC 50/60 Hz 100...130 V DC

### Complementary

Threshold tripping voltage	0.85...1.1 Un
Supply holding power	4.5 VA
Mounting mode	Fixed
Response time	55 ms (Masterpact NT) 70 ms at 800 A (Masterpact NW) 70 ms at 1000 A (Masterpact NW) 70 ms at 1250 A (Masterpact NW) 70 ms at 1600 A (Masterpact NW) 70 ms at 2000 A (Masterpact NW) 70 ms at 2500 A (Masterpact NW) 70 ms at 3200 A (Masterpact NW) 70 ms at 4000 A (Masterpact NW) 80 ms at 4000 A (Masterpact NW) 80 ms at 5000 A (Masterpact NW) 80 ms at 6300 A (Masterpact NW)

### Offer Sustainability

REACH Regulation	<input checked="" type="checkbox"/> <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> <a href="#">Yes</a>
China RoHS Regulation	<input checked="" type="checkbox"/> <a href="#">China RoHS Declaration</a>

### Contractual warranty

Warranty	18 months
----------	-----------