


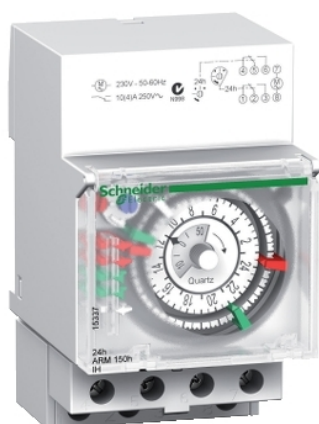

Main

Range of product	Acti 9
Product name	Acti 9 IH
Device short name	IH
Product or component type	Mechanical time switch
Number of channels	2
Function available	Manual time changeover

Complementary

Device application	Building
Load type	Parallel-corrected fluorescent tube 1 x conventional ballast 58 W Non-corrected fluorescent tube 10 x conventional ballast 58 W Serial-corrected fluorescent tube 10 x conventional ballast 58 W Non-corrected fluorescent tube 15 x conventional ballast 40 W Serial-corrected fluorescent tube 15 x conventional ballast 40 W Parallel-corrected fluorescent tube 2 x conventional ballast 40 W 230 V AC halogen lamp 1100 W 230 V AC incandescent lamp 1100 W Dual mounted fluorescent tube 3 x conventional ballast 2 x 100 W Dual mounted fluorescent tube 5 x conventional ballast 2 x 58 W Non-corrected fluorescent tube 6 x conventional ballast 100 W Serial-corrected fluorescent tube 6 x conventional ballast 100 W
Cycle duration	24 h
Maximum number of switchings	24 on - 24 off
Minimum interval duration	30 min
Type of setting	Manual time changeover
Measurement accuracy	+/- 1 s/day 20 °C
Power consumption in VA	2.5 VA
Maximum switching current	16 A - 250 V AC pf = 1 4 A - 250 V AC pf = 0.6
[Ue] rated operational voltage	230 V AC - 15...10 % at 50/60 Hz
Battery life	6 year(s)
Backup time	150 h time and program saving
Mounting support	DIN rail
9 mm pitches	6
Colour tint	White (RAL 9003)
Connections - terminals	Screw terminals
Width	54 mm
Height	82 mm
Depth	66 mm
Net weight	0.216 kg

Environment

Ambient air temperature for operation	-20...55 °C
IP degree of protection	Terminals: IP20 B

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	234 g
Package 1 Height	7.5 cm
Package 1 width	7.5 cm
Package 1 Length	10.8 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------