



**Main**

Range of product	Altistart 48
Product or component type	Soft starter
Product destination	Asynchronous motors
Product specific application	Heavy duty industry and pumps
Device short name	ATS48
Power supply voltage	208..690 V - 15..10 %
Motor power kW	11 kW at 400 V for severe applications 11 kW at 440 V for severe applications 11 kW at 500 V for severe applications 11 kW at 525 V for severe applications 15 kW at 400 V for standard applications 15 kW at 440 V for standard applications 15 kW at 660 V for severe applications 22 kW at 660 V for standard applications 22 kW at 690 V for standard applications 7.5 kW at 230 V for standard applications 18.5 kW at 500 V for standard applications 18.5 kW at 525 V for standard applications 18.5 kW at 690 V for severe applications 5.5 kW at 230 V for severe applications
Motor power hp	10 Hp at 230 V for standard applications 15 Hp at 460 V for severe applications 20 Hp at 460 V for standard applications 20 Hp at 575 V for severe applications 25 Hp at 575 V for standard applications 5 Hp at 208 V for severe applications 7.5 Hp at 208 V for standard applications 7.5 hp at 230 V for severe applications
Power dissipation in W	104 W for standard applications 74 W for standard applications
Utilisation category	AC-53A
Type of start	Start with torque control (current limited to 5 In)
I <sub>cl</sub> nominal current	32 A for connection in the motor supply line for severe applications 32 A for connection in the motor supply line for standard applications
IP degree of protection	IP20

**Complementary**

Assembly style	With heat sink
Function available	External bypass (optional)
Power supply voltage limits	177...759 V
Power supply frequency	50...60 Hz - 5...5 %
Power supply frequency limits	47.5...63 Hz
Device connection	In the motor supply line
Factory setting current	27 A
[U <sub>c</sub> ] control circuit voltage	110 - 15 % to 230 + 10 %, 50/60 Hz
Control circuit consumption	30 W
Discrete output number	2

Discrete output type	(LO1) logic output 0 V common configurable (LO2) logic output 0 V common configurable (R1) relay outputs fault relay NO (R2) relay outputs end of starting relay NO (R3) relay outputs motor powered NO
Output absolute accuracy precision	+/- 5 %
Minimum switching current	10 mA at 6 V DC for relay outputs
Maximum switching current	Logic output 0.2 A at 30 V DC Relay outputs 1.8 A at 230 V AC inductive load, cos phi = 0.5 20 ms Relay outputs 1.8 A at 30 V DC inductive load, cos phi = 0.5 20 ms
Discrete input number	5
Discrete input type	PTC, 750 Ohm at 25 °C (Stop, Run, LI3, LI4) logic, <= 8 mA 4300 Ohm
Discrete input voltage	24 V <= 30 V
Discrete input logic	Positive logic Stop, Run, LI3, LI4 at State 0: < 5 V and <= 2 mA at State 1: > 11 V, >= 5 mA
Starting current	0.4...1.3 I <sub>cl</sub> adjustable
Analogue output type	Current output AO: 0-20 mA or 4-20 mA, impedance <500 Ohm
Communication port protocol	Modbus
Connector type	1 RJ45
Communication data link	Serial
Physical interface	RS485 multidrop
Transmission rate	4800, 9600 or 19200 bps
Max nodes number	31
Protection type	Phase failure: line Thermal protection: motor Thermal protection: starter
Marking	CE
Type of cooling	Forced convection
Operating position	Vertical +/- 10 degree
Height	275 mm
Width	160 mm
Depth	190 mm
Net weight	4.9 kg
Motor power range AC-3	7...11 KW at 200...240 V 3 phases 15...25 KW at 380...440 V 3 phases 4...6 KW at 200...240 V 3 phases 15...25 kW at 480...500 V 3 phases
Motor starter type	Soft starter

## Environment

Electromagnetic compatibility	Conducted and radiated emissions level A conforming to IEC 60947-4-2 Conducted and radiated emissions level B conforming to IEC 60947-4-2 Damped oscillating waves level 3 conforming to IEC 61000-4-12 Electrostatic discharge level 3 conforming to IEC 61000-4-2 Immunity to electrical transients level 4 conforming to IEC 61000-4-4 Immunity to radiated radio-electrical interference level 3 conforming to IEC 61000-4-3 Voltage/current impulse level 3 conforming to IEC 61000-4-5
Standards	EN/IEC 60947-4-2
Product certifications	GOST TCF NOM 117 C-Tick DNV SEPRO CCC UL CSA
Vibration resistance	1 gn (f= 13...200 Hz) conforming to EN/IEC 60068-2-6 1.5 mm (f= 2...13 Hz) conforming to EN/IEC 60068-2-6
Shock resistance	15 gn for 11 ms conforming to EN/IEC 60068-2-27
Noise level	52 dB
Pollution degree	Level 3 conforming to IEC 60664-1

Relative humidity	0...95 % without condensation or dripping water conforming to EN/IEC 60068-2-3
Ambient air temperature for operation	40...60 °C (with current derating of 2 % per °C) -10...40 °C (without derating)
Ambient air temperature for storage	-25...70 °C
Operating altitude	<= 1000 m without derating > 1000...2000 m with current derating of 2.2 % per additional 100 m

### Packing Units

Package 1 Weight	7.526 kg
Package 1 Height	2.850 dm
Package 1 width	3.620 dm
Package 1 Length	2.550 dm


### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> <a href="#">Yes</a>
China RoHS Regulation	<input checked="" type="checkbox"/> <a href="#">China RoHS Declaration</a>
Environmental Disclosure	<input checked="" type="checkbox"/> <a href="#">Product Environmental Profile</a>
Circularity Profile	<input checked="" type="checkbox"/> <a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

### Contractual warranty

Warranty	18 months
----------	-----------

## Dimensions

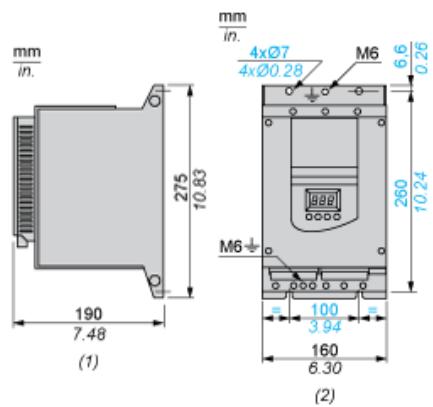

(1) Right View

(2) Front View

---

Clearance

---

