


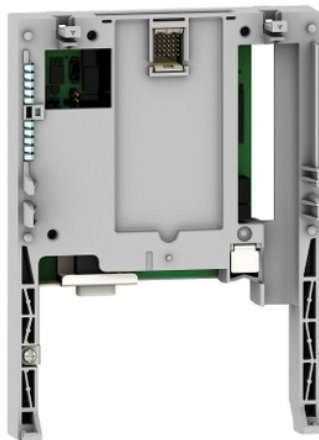

Main

Product or component type	Communication card
Range compatibility	Altivar 61Q Altivar 71 Altivar 61 Altivar 71Q
Communication port protocol	DeviceNet
Connector type	1 screw connector 5 contacts at intervals of 5.08
Transmission rate	500 kbps 125 kbps 250 kbps

Complementary

Number of addresses	1...63
Exchange mode	Inputs : polled, change of state, cyclic Outputs : polled
Communication service	I/O profile Communication monitoring can be inhibited, adjustable Allen-Bradley drive profile CiA 402 profile : "Device profile Drives and Motion Control" CIP AC Drive (02) profile
Display type	1 dual colour LED for MNS (status) Graphic display terminal for control word received Graphic display terminal for reference received
Net weight	0.3 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	285.9 g
Package 1 Height	7 cm
Package 1 width	17 cm
Package 1 Length	23 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------