


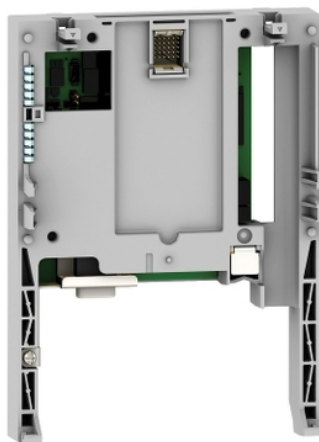

Main

Product or component type	Communication card
Range compatibility	Altivar 61 Altivar 71 Altivar 61Q Altivar 71Q
Communication port protocol	EtherNet/IP
Connector type	2 RJ45 connectors
Transmission rate	10 Mbps 100 Mbps
Physical interface	IEEE 802.3
Web services	Drive parameters Ethernet statistics Ethernet/IP setup Drive monitor E-mail Drive recorder Ethernet/IP scanner setup Security Message statistics

Complementary

Exchange mode	Half duplex and full duplex
Communication data link	LLC : IEEE 802.2 MAC : IEEE 802.3
Communication network type	IP conforming to RFC791 ICMP
Communication transport type	UDP TCP conforming to RFC793
Web server	Embedded
Communication service	CiA 402 profile I/O profile Allen-Bradley drive profile CIP AC Drive (02) profile BOOTP CIP I/O data DHCP
Display type	1 LED for Link (Link Status) 1 LED for MS (Module Status) 1 LED for NS (Network Status) 1 LED for TX/RX (Transmit/Receive port 1) 1 LED for TX/RX (Transmit/Receive port 2) Graphic display terminal for control word received Graphic display terminal for number of frames received Graphic display terminal for reference received
Net weight	0.3 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	285.9 g
Package 1 Height	7 cm
Package 1 width	17 cm
Package 1 Length	23 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------