


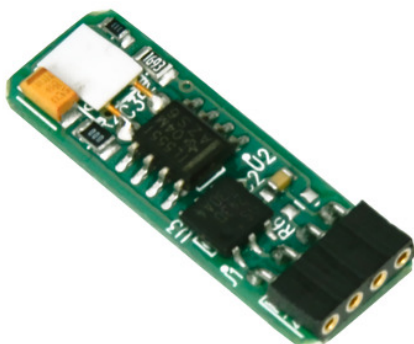

Main

Range	HS2XX
Product or component type	Sensor
Product name	Plant Room Air Quality Sensor
Sensor model	HS2XX
Device application	Duct Room application
Display type	LCD
Location	Living space Plant room
Mounting support	Duct Wall
Standards	EN 50082-1 EN 50081-1
Calibration certificate	Humidity: none
[Us] rated supply voltage	24 V AC 20...36 V DC
Targeted region	Europe Asia Pacific.

Complementary

Output type	Analog 4...20 mA Analog 0...5 V DC Analog 0...10 V DC
Range compatibility	Andover Continuum sensor DMS Drayton Network 8000 Satchwell TAC I/A series TAC I/NET TAC Vista

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.7 cm
Package 1 Width	5.1 cm
Package 1 Length	10.2 cm
Package 1 Weight	1.4 g

Offer Sustainability

EU RoHS Directive	Not applicable, out of EU RoHS legal scope
China RoHS Regulation	 China RoHS Declaration