



## Main

|                           |                                     |
|---------------------------|-------------------------------------|
| Range of product          | Harmony 9001K<br>Harmony 9001SK     |
| Product or component type | Empty enclosure                     |
| Device short name         | 9001K                               |
| Number of cut-out         | 1 cut-out                           |
| Cable entry               | 1 entry tapped for 3/4" cable gland |

## Complementary

|                     |  |
|---------------------|--|
| Product destination | For Ø 30 mm control and signalling units |
| Material            | Aluminium                                |
| Net weight          | 1.17 kg                                  |

## Environment

|                                       |  |
|---------------------------------------|--|
| Protective treatment                  | TH   |
| Ambient air temperature for storage   | -40...70 °C  |
| Ambient air temperature for operation | -25...70 °C  |
| Overvoltage category                  | II conforming to IEC 61140                                 |
| NEMA degree of protection             | NEMA 1<br>NEMA 12<br>NEMA 13<br>NEMA 3<br>NEMA 4<br>NEMA 6 |

## Packing Units

|                              |            |
|------------------------------|------------|
| Unit Type of Package 1       | PCE        |
| Number of Units in Package 1 | 1          |
| Package 1 Height             | 10.16 cm   |
| Package 1 Width              | 10.668 cm  |
| Package 1 Length             | 11.43 cm   |
| Package 1 Weight             | 1.179 kg   |
| Unit Type of Package 2       | S03        |
| Number of Units in Package 2 | 12         |
| Package 2 Height             | 30.0 cm    |
| Package 2 Width              | 30.0 cm    |
| Package 2 Length             | 40.0 cm    |
| Package 2 Weight             | 14.957 kg  |
| Unit Type of Package 3       | PAL        |
| Number of Units in Package 3 | 264        |
| Package 3 Height             | 101.6 cm   |
| Package 3 Width              | 101.6 cm   |
| Package 3 Length             | 121.92 cm  |
| Package 3 Weight             | 319.782 kg |

## Offer Sustainability


|                            |  |
|----------------------------|--|
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| REACH free of SVHC         | Yes  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes  |
| Mercury free               | Yes  |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>   |
| RoHS exemption information | <a href="#">Yes</a>  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

Below drawing shows a 2-hole enclosure. Refer to the product characteristics to get the number of holes.

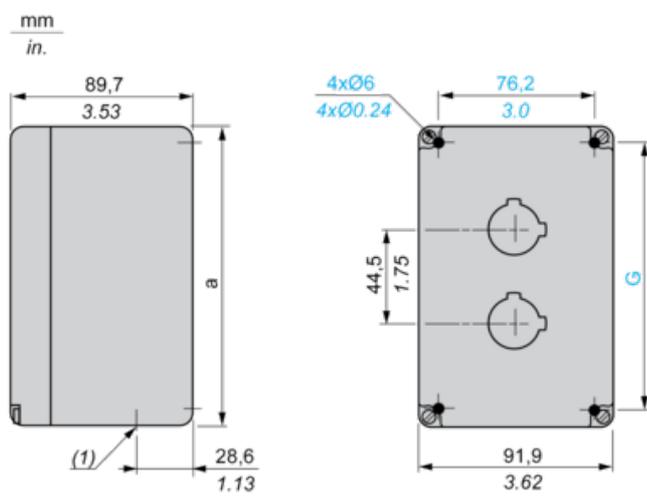

(1) Conduit thread: 9001 KY•: 3/4". 9001 TY•: 14 mm / 0.55 in.

| a     |      | G    |      |
|-------|------|------|------|
| mm    | in.  | mm   | in.  |
| 101.6 | 4.00 | 69.9 | 2.75 |