9001KYSS1
Empty enclosure control station, Harmony 9001K, Harmony 9001SK, stainless steel, 1 cut out, 30mm

Main

Range of product	Harmony 9001SK Harmony 9001K
Product or component type	Empty enclosure
Device short name	9001K
Number of cut-out	1 cut-out
Cable entry	1 entry tapped for 3/4" knockout

Complementary

Product destination	For Ø 30 mm control and signalling units
Material	Stainless steel
Net weight	1.06 kg

Environment

Protective treatment	TH
Ambient air temperature for storage	-40…70 °C
Ambient air temperature for operation	-25…70 °C
Overvoltage category	II conforming to IEC 61140
NEMA degree of protection	NEMA 1 NEMA 12 NEMA 3 NEMA 4 NEMA 4X

Packing Units

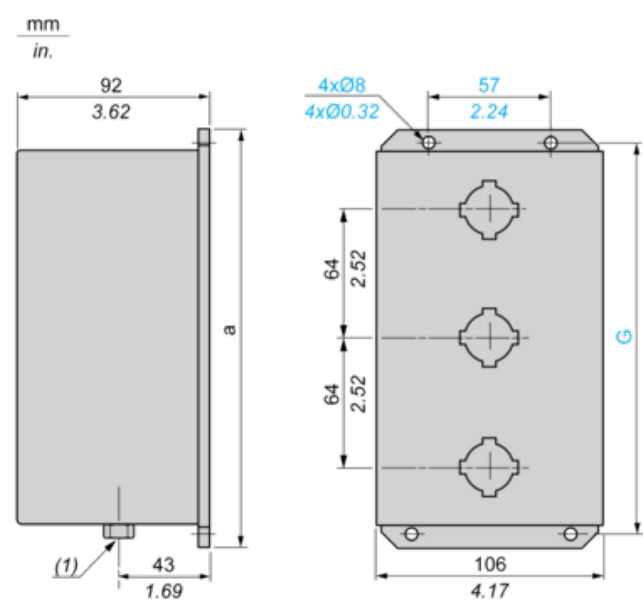|	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	14.224 cm
Package 1 Width	13.97 cm
Package 1 Length	16.256 cm
Package 1 Weight	1.08 kg
Unit Type of Package 2	S03
Number of Units in Package 2	6
Package 2 Height	30.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	7.097 kg

Offer Sustainability

REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months

Life Is On Schneider Electric

China RoHS Declaration

9001KYSS1

Dimensions

Below drawing shows a 3-hole enclosure. Refer to the product characteristics to get the number of holes

(1) Knockout conduit thread: 3/4".

a		G	
mm	in.	mm	in.
133	5.24	117	4.61