


Product data sheet

Characteristics

ABWRS504

Empty enclosure, Prisma XS, wall-mounted, with door, IP44, (W) 1300mm x (H) 650mm x (D) 210mm

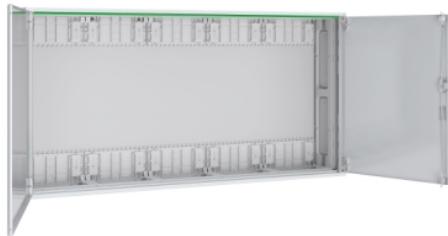

Main

Range	Prisma
Product name	Prisma XS
Product or component type	Enclosure
Enclosure type	Empty enclosure
Enclosure/cubicle description	Wall-mounted enclosure depth 210 mm
Width	1300 mm
Height	650 mm
Depth	210 mm
Embedding depth	210 mm
Number of 18 mm modules per row	20 x 12
Electrical insulation class	Class II
Additional information	Can be combined side by side and one on top of another
Condition of use	Indoor
Provided equipment	10 x cable entry plate 1 x double door
Type of front cover	Plain door

Complementary

Cable entry	Entry from the bottom or from the top
Door type	Internal plain
Number of locks	3
Door opening side	Reversible
Door opening angle	110 °
Enclosure mounting	Flush Surface Recessed
Mounting support	Hollow wall Concrete
9 mm pitches	480
Total number of 18 mm modules	240
[In] rated current	400 A
Locking options description	Sealable Keylock option
Enclosure material	Enclosure: powder coated steel Door: powder coated steel Inside enclosure: plastic
Net weight	21.100 kg
Colour	White (RAL 9016)

Environment

IP degree of protection	IP44
IK degree of protection	IK10
Standards	IEC 61439 EN 62208

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	68 cm
Package 1 Width	131 cm
Package 1 Length	22 cm
Package 1 Weight	25.251 kg
Unit Type of Package 2	P12
Number of Units in Package 2	5
Package 2 Height	146 cm
Package 2 Width	80 cm
Package 2 Length	120 cm
Package 2 Weight	138.255 kg