


# ABWRS508L04

Empty enclosure, Prisma XS, wall-mounted, without door, IP30, (W) 1300mm x (H) 1250mm x (D) 210mm

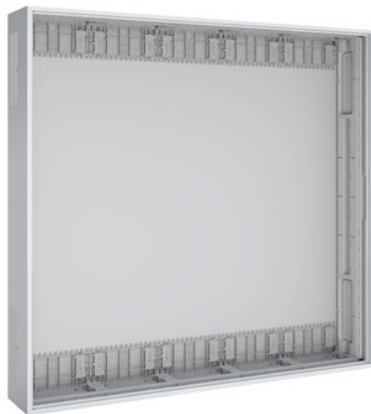

## Main

|                                 |                                                        |
|---------------------------------|--------------------------------------------------------|
| Range                           | Prisma                                                 |
| Product name                    | Prisma XS                                              |
| Product or component type       | Enclosure                                              |
| Enclosure type                  | Empty enclosure                                        |
| Enclosure/cubicle description   | Wall-mounted enclosure depth 210 mm                    |
| Width                           | 1300 mm                                                |
| Height                          | 1250 mm                                                |
| Depth                           | 210 mm                                                 |
| Embedding depth                 | 210 mm                                                 |
| Number of 18 mm modules per row | 40 x 12                                                |
| Electrical insulation class     | Class II                                               |
| Additional information          | Can be combined side by side and one on top of another |
| Condition of use                | Indoor                                                 |
| Provided equipment              | 10 x cable entry plate                                 |
| Type of front cover             | Without                                                |

## Complementary

|                               |                                                             |
|-------------------------------|-------------------------------------------------------------|
| Cable entry                   | Entry from the bottom or from the top                       |
| Enclosure mounting            | Flush<br>Surface<br>Recessed                                |
| Mounting support              | Hollow wall<br>Concrete                                     |
| 9 mm pitches                  | 960                                                         |
| Total number of 18 mm modules | 480                                                         |
| [In] rated current            | 400 A                                                       |
| Enclosure material            | Enclosure: powder coated steel<br>Inside enclosure: plastic |
| Net weight                    | 23.200 kg                                                   |
| Colour                        | White (RAL 9016)                                            |

## Environment

|                         |                       |
|-------------------------|-----------------------|
| IP degree of protection | IP30                  |
| IK degree of protection | IK10                  |
| Standards               | IEC 61439<br>EN 62208 |

## Packing Units

|                              |            |
|------------------------------|------------|
| Unit Type of Package 1       | PCE        |
| Number of Units in Package 1 | 1          |
| Package 1 Height             | 131.000 cm |
| Package 1 Width              | 23.500 cm  |
| Package 1 Length             | 129.000 cm |

|                              |            |
|------------------------------|------------|
| Package 1 Weight             | 30.000 kg  |
| Unit Type of Package 2       | PAL        |
| Number of Units in Package 2 | 3          |
| Package 2 Height             | 145.000 cm |
| Package 2 Width              | 80.000 cm  |
| Package 2 Length             | 146.000 cm |
| Package 2 Weight             | 105.000 kg |