


# KRA2500RT43

Adaptor, Canalis KRA, aluminium, 2500A, 3L +PE, fixed length 600mm, interconnection with Canalis KTA 3L+PE

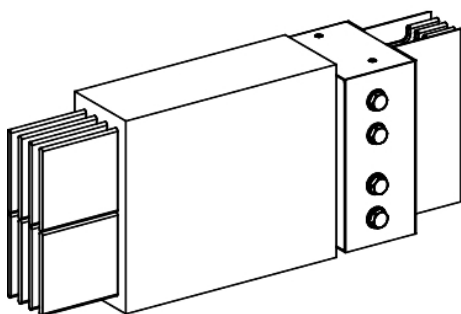

## Main

|                                |                                |
|--------------------------------|--------------------------------|
| Range                          | Canalis                        |
| Product name                   | KR                             |
| Product or component type      | Adaptor                        |
| Device short name              | KRA                            |
| Range compatibility            | Canalis KRA[RETURN]Canalis KTA |
| Material                       | Aluminium                      |
| [Ie] rated operational current | 2500 A at 35 °C                |
| Polarity                       | 3L + N or 3L + PE or 3L + PEN  |
| Length                         | 600 mm                         |

## Complementary

|                                          |                                                                                                                                                                                                                                                                                |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accessory / separate part category       | Adaptation accessory                                                                                                                                                                                                                                                           |
| Housing material                         | Mineral epoxy resin                                                                                                                                                                                                                                                            |
| Contacts material                        | Tinned aluminium                                                                                                                                                                                                                                                               |
| [Ue] rated operational voltage           | 1000 V                                                                                                                                                                                                                                                                         |
| Network frequency                        | 50/60 Hz                                                                                                                                                                                                                                                                       |
| [Ui] rated insulation voltage            | 1000 V                                                                                                                                                                                                                                                                         |
| [Icw] rated short-time withstand current | 80 kA                                                                                                                                                                                                                                                                          |
| [Ipk] rated peak withstand current       | 176 kA                                                                                                                                                                                                                                                                         |
| Radiated magnetic field                  | 27.94 mT                                                                                                                                                                                                                                                                       |
| Thermal stress limit                     | 6400000 kA².s                                                                                                                                                                                                                                                                  |
| Maximum voltage drop                     | <0.0045 V with power factor = 1 at 50 Hz with 1A for 100 m long<br><0.0062 V with power factor = 0.9 at 50 Hz with 1A for 100 m long<br><0.0066 V with power factor = 0.8 at 50 Hz with 1A for 100 m long<br><0.0067 V with power factor = 0.7 at 50 Hz with 1A for 100 m long |
| Mounting location                        | Indoor use only                                                                                                                                                                                                                                                                |
| Installation direction                   | Vertical<br>Horizontal                                                                                                                                                                                                                                                         |
| Earth conductor                          | Standard earth                                                                                                                                                                                                                                                                 |
| Product certifications                   | CE[RETURN]EAC[RETURN]ATEX                                                                                                                                                                                                                                                      |
| Standards                                | IEC 61439-6                                                                                                                                                                                                                                                                    |
| Width                                    | KT: 140 mm<br>KR: 100 mm                                                                                                                                                                                                                                                       |
| Height                                   | KR: 270 mm<br>KT: 244 mm                                                                                                                                                                                                                                                       |
| Colour                                   | Grey (RAL 7030)                                                                                                                                                                                                                                                                |
| Linear load                              | 68 kg/m                                                                                                                                                                                                                                                                        |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the company. This information is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

|                              |                                                                                                                                                                                                                                                   |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IP degree of protection      | IP55 conforming to IEC 60529                                                                                                                                                                                                                      |
| IK degree of protection      | IK08 conforming to IEC 62262                                                                                                                                                                                                                      |
| Pollution degree             | 3                                                                                                                                                                                                                                                 |
| Fire resistance              | 760 °C 180 min conforming to IEC 60331-1                                                                                                                                                                                                          |
| Derating factor              | 0...35 °C (100 % of In)<br>35...40 °C (96 % of In)<br>40...45 °C (89 % of In)<br>45...50 °C (84 % of In)<br>50...55 °C (78 % of In)                                                                                                               |
| Operating altitude           | 1000 m 100 % of In (indoor)<br>2000 m 99 % of In (indoor)<br>3000 m 96 % of In (indoor)<br>4000 m 90 % of In (indoor)<br>1000 m 98 % of In (outdoor)<br>2000 m 94 % of In (outdoor)<br>3000 m 89 % of In (outdoor)<br>4000 m 83 % of In (outdoor) |
| Environmental characteristic | EMC directive conforming to IEC 61439-6                                                                                                                                                                                                           |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Height             | 27 cm    |
| Package 1 Width              | 10 cm    |
| Package 1 Length             | 60 cm    |
| Package 1 Weight             | 42.84 kg |

## Offer Sustainability

|                             |                                                                                                                             |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status    | Green Premium product                                                                                                       |
| REACH Regulation            | <a href="#">REACH Declaration</a>                                                                                           |
| REACH free of SVHC          | Yes                                                                                                                         |
| EU RoHS Directive           | Compliant <a href="#">EU RoHS Declaration</a>                                                                               |
| Toxic heavy metal free      | Yes                                                                                                                         |
| Mercury free                | Yes                                                                                                                         |
| China RoHS Regulation       | <a href="#">China RoHS Declaration</a>                                                                                      |
| RoHS exemption information  | <a href="#">Yes</a>                                                                                                         |
| Environmental Disclosure    | <a href="#">Product Environmental Profile</a>                                                                               |
| Circularity Profile         | <a href="#">End Of Life Information</a>                                                                                     |
| WEEE                        | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Halogen content performance | Halogen free product                                                                                                        |