


Product data sheet

Characteristics

KRB0460ZA48

Vertical floor fix point support, Canalis KR, vertical busbar trunking, 4000A KRA, 5000A KRC, 3/4 conductors busbar

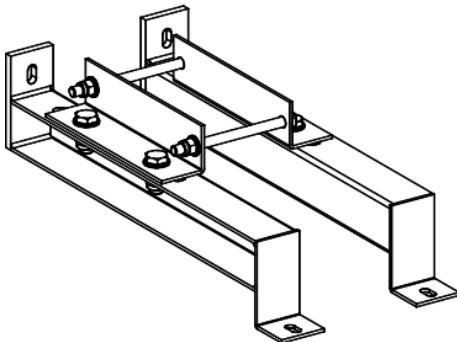

Main

Range	Canalis
Product name	KR
Product or component type	Fix spring support
Device short name	KRB

Complementary

Accessory / separate part category	Support accessory
Fixing device mounting	Floor mounting
Mounting position	Vertical
[Ie] rated operational current	4000 A with aluminium 5000 A with copper
Busbar trunking polarity	3L 3L + N or 3L + PE or 3L + PEN
Material	Stainless steel 316
Standards	IEC 61439-2 IEC 61439-6
Width	100 mm
Height	460 mm
Quantity per set	Set of 1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.5 cm
Package 1 Width	23.0 cm
Package 1 Length	84.0 cm
Package 1 Weight	15.41 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product
