


KSB125HD502

Tap off unit, Canalis KS 100A to 1000A, for switch disconnecter FuPacT ISFT, 125A, 3L +PEN, IP55, RAL9001

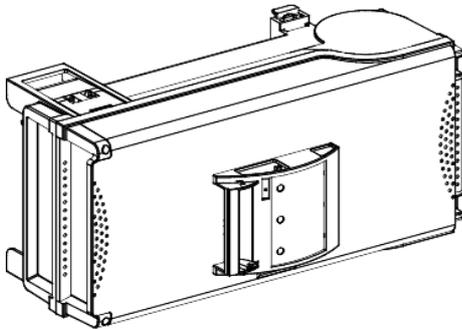

Main

Range of product	Canalis
Range compatibility	Canalis KS busbar trunking
Product or component type	Tap-off unit
Busbar trunking compatibility	Canalis KS busbar trunkingplug-in
[Ie] rated operational current	125 A at 35 °C
Protection type	FuPacT ISFT switch-disconnector fuse: DIN fuse, size NH00
Provided equipment	fuse
Mounting mode	Plug-in with auto-clamping system
Colour	White (RAL 9001)

Complementary

Device application	High power distribution
[Ue] rated operational voltage	500 V
[Ui] rated insulation voltage	500 V
Electrical connection	Cable gland - ISO63 (x2)
Standards	IEC 61439-1 IEC 61439-6
Body material	Plastic

Environment

IP degree of protection	IP20 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	21.0 cm
Package 1 Width	24.0 cm
Package 1 Length	45.5 cm
Package 1 Weight	3.873 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile

Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
