


# Product data sheet

## Characteristics

### KSB400HD502

Tap off unit, Canalis KS 500A to 1000A, for switch disconnector FuPacT ISFT, 400A, 3L +PEN, IP55, RAL9001

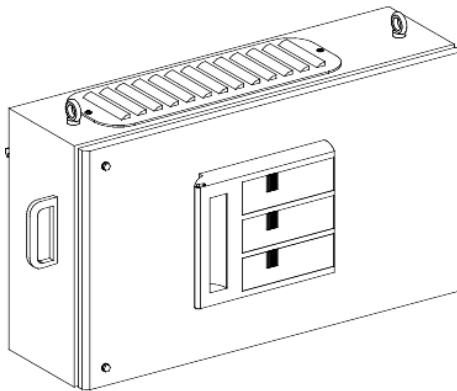

#### Main

Range of product	Canalis
Range compatibility	Canalis KS busbar trunking
Product or component type	Tap-off unit
Busbar trunking compatibility	Canalis KS busbar trunkingplug-in
[Ie] rated operational current	400 A at 35 °C
Protection type	FuPacT ISFT switch-disconnector fuse: DIN fuse, size NH2
Provided equipment	fuse
Mounting mode	Plug-in with auto-clamping system
Colour	White (RAL 9001)

#### Complementary

Device application	High power distribution
[Ue] rated operational voltage	500 V
[Ui] rated insulation voltage	500 V
Electrical connection	Cable gland - ISO63 (x2)
Standards	IEC 61439-1 IEC 61439-6
Body material	Metal

#### Environment

IP degree of protection	IP20 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

#### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	38.000 cm
Package 1 Width	46.000 cm
Package 1 Length	75.000 cm
Package 1 Weight	24.430 kg

#### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	Yes
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins