


KTA1600ET71A

Straight transport length, Canalis KTA, aluminium, 1600A, 3L+N+PER (Cu), high I_{cw}, made to measure 0.5-1.5m, RAL9001

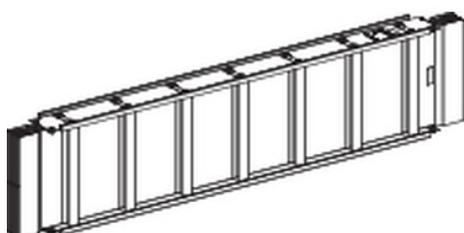

Main

| | |
|---|-------------------------------|
| Range | Canalis |
| Product name | KT |
| Product or component type | Busbar trunking |
| Busbar description | Transport length |
| Device short name | KTA |
| Device application | Feeder length |
| Material | Aluminium |
| [I _e] rated operational current | 1600 A at 35 °C |
| Polarity | 3L + N + PER |
| Number of tap-off outlets | 0 |
| Earth conductor | Reinforced |
| Short-circuit level | Reinforced version |
| Length | 500...1500 mm |
| Provided equipment | Trunking unit Joining unit |

Complementary

| | |
|---|--|
| Housing material | Polyester film |
| Contacts material | Copper |
| [U _e] rated operational voltage | 1000 V |
| Network frequency | 50/60 Hz |
| [U _i] rated insulation voltage | 1000 V |
| [I _{cw}] rated short-time withstand current | 85 kA |
| [I _{pk}] rated peak withstand current | 187 kA |
| Radiated magnetic field | 0.9 μT |
| Thermal stress limit | 7225000 kA ² .s |
| THDI | 0...15 % 1600 A 15...33 % 2000 A 33...100 % 2500 A |
| Maximum voltage drop | <0.0037 V with power factor = 1 at 50 Hz with 1A for 100 m long <0.0038 V with power factor = 0.9 at 50 Hz with 1A for 100 m long <0.0036 V with power factor = 0.8 at 50 Hz with 1A for 100 m long <0.0034 V with power factor = 0.7 at 50 Hz with 1A for 100 m long |
| Mounting mode | By hook |
| Mounting support | Pendant Cantilever arm |
| Installation direction | Vertical Horizontal |
| Neutral position | Right |
| Standards | IEC 61439-1 IEC 61439-6 |
| Dimension type | Made to measure |
| Width | 146 mm |
| Height | 194 mm |

| | |
|-------------|------------------|
| Colour | White (RAL 9001) |
| Linear load | 26 kg/m |

Environment

| | |
|-------------------------|---|
| IP degree of protection | IP55 conforming to IEC 60529 |
| IK degree of protection | IK08 conforming to IEC 62262 |
| Derating factor | 0...35 °C (100 % of In) 35...40 °C (97 % of In) 40...45 °C (93 % of In) 45...50 °C (90 % of In) 50...55 °C (86 % of In) |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 492.76 cm |
| Package 1 Width | 14.6 cm |
| Package 1 Length | 150.0 cm |
| Package 1 Weight | 40.95 kg |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Compliant with Exemptions |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |