


# KTA2000ER43

Flat elbow feed unit, Canalis KTA, aluminium, 2000A, 3L+N+PE, made to measure dimensions, neutral N3, white RAL9001

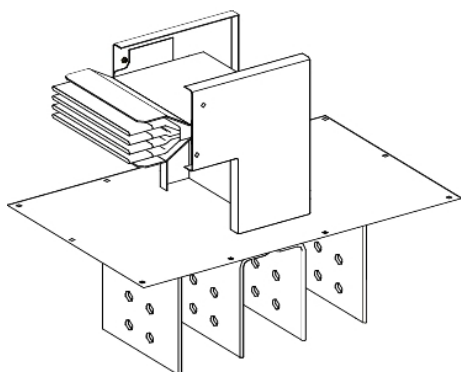

## Main

|                                |                                         |
|--------------------------------|-----------------------------------------|
| Range                          | Canalis                                 |
| Product name                   | KT                                      |
| Product or component type      | Flatwise elbow feeder trunking          |
| Device short name              | KTA                                     |
| Device application             | Feeder length                           |
| Supply                         | Switchboard<br>Oil-immersed transformer |
| Material                       | Aluminium                               |
| [Ie] rated operational current | 2000 A at 35 °C                         |
| Neutral position               | Down                                    |
| Direction change type          | Direction 1: edgewise to left           |
| Earth conductor                | Standard earth                          |
| Short-circuit level            | Standard version                        |
| Provided equipment             | Trunking unit                           |

## Complementary

|                                          |                                                                                                                                                                                                                                                                               |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Housing material                         | Polyester film                                                                                                                                                                                                                                                                |
| Contacts material                        | Copper                                                                                                                                                                                                                                                                        |
| [Ue] rated operational voltage           | 1000 V                                                                                                                                                                                                                                                                        |
| Network frequency                        | 50/60 Hz                                                                                                                                                                                                                                                                      |
| [Ui] rated insulation voltage            | 1000 V                                                                                                                                                                                                                                                                        |
| [Icw] rated short-time withstand current | 70 kA                                                                                                                                                                                                                                                                         |
| [Ipk] rated peak withstand current       | 154 kA                                                                                                                                                                                                                                                                        |
| Radiated magnetic field                  | 1.3 µT                                                                                                                                                                                                                                                                        |
| Thermal stress limit                     | 4900000 kA².s                                                                                                                                                                                                                                                                 |
| THDI                                     | 0...15 % 2000 A<br>15...33 % 2500 A<br>33...100 % 3200 A                                                                                                                                                                                                                      |
| Maximum voltage drop                     | <0.0029 V with power factor = 1 at 50 Hz with 1A for 100 m long<br><0.003 V with power factor = 0.9 at 50 Hz with 1A for 100 m long<br><0.0029 V with power factor = 0.8 at 50 Hz with 1A for 100 m long<br><0.0027 V with power factor = 0.7 at 50 Hz with 1A for 100 m long |
| Mounting mode                            | By screws                                                                                                                                                                                                                                                                     |
| Mounting support                         | Plate                                                                                                                                                                                                                                                                         |
| Polarity                                 | 3L + N + PE                                                                                                                                                                                                                                                                   |
| Number of tap-off outlets                | 0                                                                                                                                                                                                                                                                             |
| Standards                                | IEC 61439-6<br>IEC 61439-1                                                                                                                                                                                                                                                    |
| Dimension type                           | Made to measure                                                                                                                                                                                                                                                               |
| Connection pitch                         | 80...250 mm                                                                                                                                                                                                                                                                   |
| Depth                                    | 350 mm                                                                                                                                                                                                                                                                        |
| Height                                   | Direction 1: 200...534 mm                                                                                                                                                                                                                                                     |
| Length                                   | Direction 2: 300 mm                                                                                                                                                                                                                                                           |
| Colour                                   | White (RAL 9001)                                                                                                                                                                                                                                                              |
| Linear load                              | 26 kg/m                                                                                                                                                                                                                                                                       |

## Environment

|                         |                                                                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| IP degree of protection | IP55 conforming to IEC 60529                                                                                                        |
| IK degree of protection | IK08 conforming to IEC 62262                                                                                                        |
| Derating factor         | 0...35 °C (100 % of In)<br>35...40 °C (97 % of In)<br>40...45 °C (93 % of In)<br>45...50 °C (90 % of In)<br>50...55 °C (86 % of In) |

## Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type of Package 1       | PCE     |
| Number of Units in Package 1 | 1       |
| Package 1 Height             | 35.0 cm |
| Package 1 Width              | 55.0 cm |
| Package 1 Length             | 77.5 cm |
| Package 1 Weight             | 32.2 kg |

## Offer Sustainability

|                             |                                                                                                                             |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status    | Green Premium product                                                                                                       |
| REACH Regulation            | <a href="#">REACH Declaration</a>                                                                                           |
| REACH free of SVHC          | Yes                                                                                                                         |
| EU RoHS Directive           | Compliant <a href="#">EU RoHS Declaration</a>                                                                               |
| Toxic heavy metal free      | Yes                                                                                                                         |
| Mercury free                | Yes                                                                                                                         |
| China RoHS Regulation       | <a href="#">China RoHS Declaration</a>                                                                                      |
| RoHS exemption information  | <a href="#">Yes</a>                                                                                                         |
| Environmental Disclosure    | <a href="#">Product Environmental Profile</a>                                                                               |
| Circularity Profile         | <a href="#">End Of Life Information</a>                                                                                     |
| WEEE                        | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free                    | Yes                                                                                                                         |
| Halogen content performance | Halogen free product                                                                                                        |