


Product data sheet

Characteristics

KTA2500YA7

Junction block, Canalis KTA, single reference, 2500A, aluminium conductors, 3L+N+PE Reinforced (Cu)

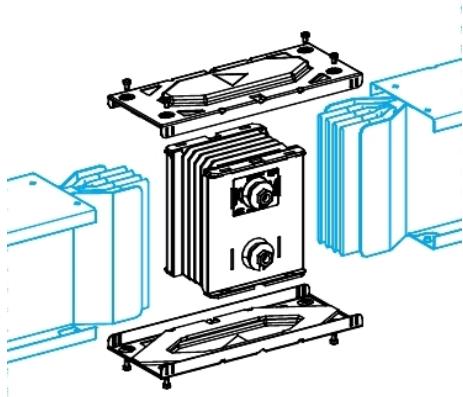

Main

Range	Canalis
Product name	KT
Product or component type	Junction block
Offer type	Spare part
Busbar description	Standard
Range compatibility	Canalis KTA
Accessory / separate part category	Connection accessory
Device application	Jointing
Material	Aluminium
[Ie] rated operational current	2500 A with aluminium
Polarity	3L + N + PER
PE conductor	Reinforced
lcw short-circuit version	Reinforced version
IP degree of protection	IP55 conforming to IEC 60529
Length	360 mm

Complementary

Housing material	Polyester film
Mounting support	Self-tapping screw
[Ue] rated operational voltage	1000 V
Number of circuits	1
Colour	White (RAL 9001)
Width	140 mm
Height	244 mm
Standards	IEC 61439-6 IEC 61439-1

Environment

IK degree of protection	IK08 conforming to IEC 62262
-------------------------	------------------------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	24.4 cm
Package 1 Width	14.0 cm
Package 1 Length	40.0 cm
Package 1 Weight	40.0 kg

Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant with Exemptions
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins