


# KTA3200EB440

Straight length, Canalis KTA, aluminium, 3200A, 3L+N+PE, fixed length 4m, 2 outlets for bolt on tap off unit, RAL9001

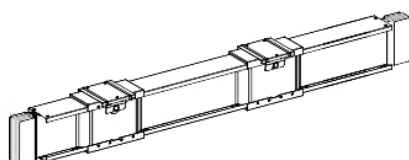

## Main

Range	Canalis
Product name	KT
Product or component type	Busbar trunking
Busbar description	Distribution length
Device short name	KTA
Tap-off unit compatibility	Bolt-on tap-off unit from Canalis - KT
Device application	High power distribution
Material	Aluminium
[Ie] rated operational current	3200 A at 35 °C
Polarity	3L + N + PE
Number of tap-off outlets	2
Nominal output current	400...1250 A
Earth conductor	Standard earth
Short-circuit level	Standard version
Length	4000 mm
Provided equipment	Jointing unit Trunking unit

## Complementary

Housing material	Polyester film
Contacts material	Copper
[Ue] rated operational voltage	1000 V
Network frequency	50/60 Hz
[Ui] rated insulation voltage	1000 V
[Icw] rated short-time withstand current	86 kA
[Ipk] rated peak withstand current	189 kA
Electrical connection	Bolted connection
Radiated magnetic field	2.1 µT
Thermal stress limit	7396000 kA <sup>2</sup> .s
THDI	0...15 % 3200 A 15...33 % 4000 A
Maximum voltage drop	<0.0018 V with power factor = 1 at 50 Hz with 1A for 100 m long <0.0019 V with power factor = 0.9 at 50 Hz with 1A for 100 m long <0.0018 V with power factor = 0.8 at 50 Hz with 1A for 100 m long <0.0017 V with power factor = 0.7 at 50 Hz with 1A for 100 m long
Mounting mode	By hook
Mounting support	Cantilever arm Pendant
Installation direction	Horizontal Vertical
Neutral position	Right
Tap-off unit interval	2000 mm
Standards	IEC 61439-6 IEC 61439-1
Dimension type	Fix

Width	140 mm
Height	324 mm
Colour	White (RAL 9001)
Net weight	148 kg
Linear load	37 kg/m

## Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262
Derating factor	0...35 °C (100 % of In) 35...40 °C (97 % of In) 40...45 °C (93 % of In) 45...50 °C (90 % of In) 50...55 °C (86 % of In)

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	32.4 cm
Package 1 Width	400.0 cm
Package 1 Length	14.0 cm
Package 1 Weight	161.2 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins