


KTB1000HF4

Bolted tap-off unit, Canalis KT, with switch disconnector for DIN fuse size T4, 1000A, 3L +N+PE, white RAL9001

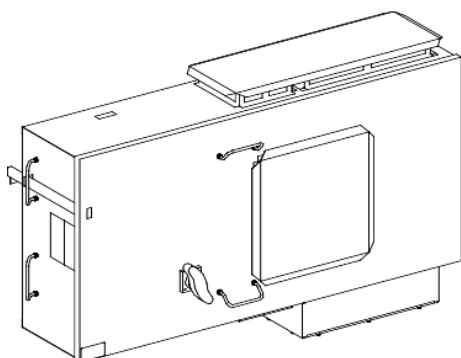

Main

Range of product	Canalis
Range compatibility	Canalis KT busbar trunking
Product or component type	Tap-off unit
Busbar trunking compatibility	Canalis KT busbar trunking with KS type plug-in
[Ie] rated operational current	1000 A at 35 °C
Protection type	Switch-disconnector fuse: DIN fuse, size T4 - 1000 A
Provided equipment	Switch disconnector
Mounting mode	Bolt-on
Tap-off unit polarity	3L+N+PE

Complementary

Device application	High power distribution
[Ue] rated operational voltage	500 V
[Ui] rated insulation voltage	500 V
Network frequency	50/60 Hz
Control type	Rotary handle
Electrical connection	Bolted connection 300 mm² (x4) - for L/N Bolted connection 200 mm² (x1) - for PE
Door/cover opening side	Front
Standards	IEC 61439-1 IEC 61439-6
Colour	White (RAL 9001)
18 mm pitches	80
Width	1438 mm
Depth	330 mm
Height	690 mm
Net weight	96 kg

Environment

IP degree of protection	IP31 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	32.0 cm
Package 1 Width	68.0 cm
Package 1 Length	142.5 cm
Package 1 Weight	102.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes