


LVS03031

Mounting plate, PrismaSeT G, for NSX/CVS/
Vigi 250A, horizontal fixed, rotary handle, 5M,
W600mm



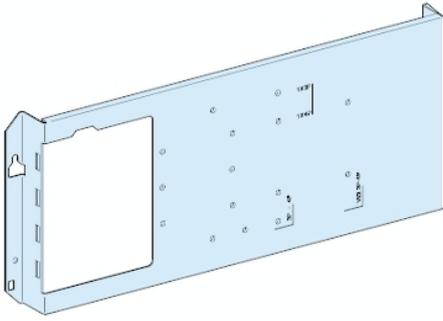

Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure
Installation description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Floor-standing enclosure - width 850 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm
Installed device	EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation
Poles description	1 x 3P: fixed CVS100...160 horizontal installation 1 x 4P: fixed CVS100...160 horizontal installation 1 x 3P: fixed CVS250 horizontal installation 1 x 4P: fixed CVS250 horizontal installation 1 x 3P: fixed NSX100...160 horizontal installation 1 x 4P: fixed NSX100...160 horizontal installation 1 x 3P: fixed NSX250 horizontal installation 1 x 4P: fixed NSX250 horizontal installation
Condition of using cable tie	Need additional plate (2M high) when installation of device is in horizontal

Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Cable entry	Cut-out plates 0.33 mm top 92 mm Cut-out plates 0.31 mm top 42 mm Cut-out plates 0.31 mm bottom 42 mm
Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	600 mm
Height	150 mm

Net weight

1.08 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.2 cm
Package 1 Width	19.2 cm
Package 1 Length	47.0 cm
Package 1 Weight	1.099 kg
Unit Type of Package 2	S04
Number of Units in Package 2	16
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	18.526 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product