


LVS03032

Mounting plate, PrismaSeT G, for NSX/NSX
Vigi/INS-INV 250A, horizontal fixed, plug-in/
motor mech, 4M, W600+300/W850



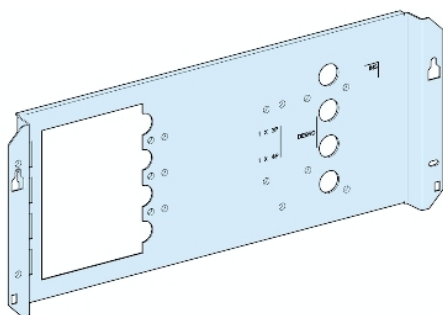

Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure
Installation description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm
Installed device	ComPact: fixed INS250 - control: lateral handle - vertical installation ComPact: fixed INV250 - control: lateral handle - vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle - horizontal installation
Poles description	1 x 3P: fixed NSX100...160 horizontal installation 1 x 4P: fixed NSX100...160 horizontal installation 1 x 3P: fixed NSX250 horizontal installation 1 x 4P: fixed NSX250 horizontal installation 1 x 3P: fixed INS250 vertical installation 1 x 4P: fixed INS250 vertical installation 1 x 3P: fixed INV250 vertical installation 1 x 4P: fixed INV250 vertical installation 1 x 3P: plug-in NSX100...160 horizontal installation 1 x 4P: plug-in NSX100...160 horizontal installation 1 x 3P: plug-in NSX250 horizontal installation 1 x 4P: plug-in NSX250 horizontal installation
Condition of using cable tie	Need additional plate (2M high) when installation of device is in horizontal Need additional plate (1M high) when installation of device is in vertical
Number of vertical modules [50 mm]	4 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 8 module(s): INS250, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 8 module(s): INS250, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure) 8 module(s): INV250, direct with long terminal shield in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 8 module(s): INV250, direct with long terminal shield in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)

Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Cable entry	Cut-out plates 0.31 mm top or bottom 42 mm
Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	600 mm
Height	150 mm
Net weight	0.96 kg
Functional unit	600 mm PrismaSeT G floor-standing enclosure ComPact INS250 fixed lateral handle vertical 3P 1 direct with long terminal shield 8 0.31 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 fixed lateral handle vertical 3P 1 direct with long terminal shield 8 0.31 mm 600 mm PrismaSeT G floor-standing enclosure ComPact INS250 fixed lateral handle vertical 4P 1 direct with long terminal shield 8 0.31 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 fixed lateral handle vertical 4P 1 direct with long terminal shield 8 0.31 mm 600 mm PrismaSeT G floor-standing enclosure ComPact INV250 fixed lateral handle vertical 3P 1 direct with long terminal shield 8 0.31 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INV250 fixed lateral handle vertical 3P 1 direct with long terminal shield 8 0.31 mm 600 mm PrismaSeT G floor-standing enclosure ComPact INV250 fixed lateral handle vertical 4P 1 direct with long terminal shield 8 0.31 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INV250 fixed lateral handle vertical 4P 1 direct with long terminal shield 8 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...160 without fixed motor mechanism horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...160 without fixed motor mechanism horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...160 without plug-in toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...160 without plug-in toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...160 without fixed motor mechanism horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...160 without fixed motor mechanism horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...160 without plug-in toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...160 without plug-in toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed motor mechanism horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed motor mechanism horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without plug-in toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without plug-in toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed motor mechanism horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed motor mechanism horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without plug-in toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without plug-in toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	18.9 cm
Package 1 Length	47.2 cm
Package 1 Weight	1.018 kg
Unit Type of Package 2	S04
Number of Units in Package 2	20
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	21.138 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product