


LVS03033

Mounting plate, PrismaSeT G, for NSX Vigi/
CVS 250A, horizontal fixed, toggle, 4M,
W600+300/W850mm



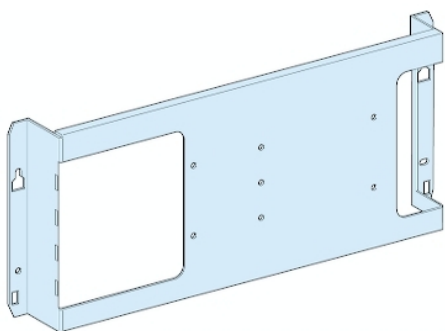

Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure
Installation description	Floor-standing enclosure - width 850 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm
Installed device	ComPact: fixed NSX100...250 and ammeter without earth leakage protection - control: toggle - horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle - horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: toggle - horizontal installation
Poles description	1 x 3P: fixed CVS100...160 horizontal installation 1 x 4P: fixed CVS100...160 horizontal installation 1 x 3P: fixed CVS250 horizontal installation 1 x 4P: fixed CVS250 horizontal installation 1 x 3P: fixed NSX100...160 horizontal installation 1 x 4P: fixed NSX100...160 horizontal installation 1 x 3P: fixed NSX250 horizontal installation 1 x 4P: fixed NSX250 horizontal installation 1 x 3P: fixed NSX100...250 and ammeter horizontal installation 1 x 4P: fixed NSX100...250 and ammeter horizontal installation
Condition of using cable tie	Need additional plate (2M high) when installation of device is in horizontal

Number of vertical modules [50 mm]	4 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 4 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 4 module(s): NSX100...250 and ammeter without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX100...250 and ammeter without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 4 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Cable entry	Cut-out plates 0.31 mm top or bottom 42 mm
Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	600 mm
Height	150 mm

Net weight	0.94 kg
Functional unit	600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...250 and ammeter without fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...250 and ammeter without fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...250 and ammeter without fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...250 and ammeter without fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS100...160 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS100...160 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 850 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS100...160 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS100...160 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 850 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS250 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS250 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 850 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS250 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS250 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 850 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...160 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...160 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 850 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...160 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...160 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 850 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 with fixed toggle horizontal 3P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm 850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 with fixed toggle horizontal 4P 1 direct with long terminal shield 4 0.31 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.3 cm
Package 1 Width	19.0 cm
Package 1 Length	47.0 cm

Package 1 Weight	981.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	10
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	10.622 kg
Unit Type of Package 3	P12
Number of Units in Package 3	120
Package 3 Height	102.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	139.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product