


# LVS03043

Mounting plate, PrismaSeT G, for NSX/  
INS-INV 250A, changeover, rotary handle,  
W600mm

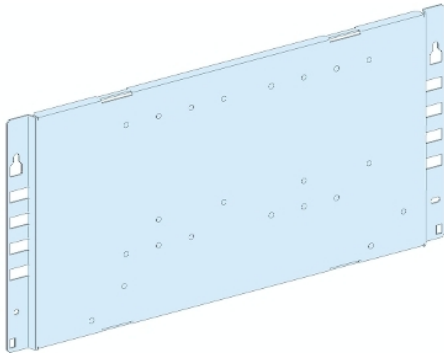

## Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure
Installation description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Installed device	ComPact: fixed INS250 source changeover - control: direct front rotary handle - vertical installation ComPact: fixed INS250 source changeover - control: mechanical interlock - vertical installation ComPact: fixed INV250 source changeover - control: mechanical interlock - vertical installation Source changeover: fixed NSX100...250 source changeover - control: mechanical interlock - vertical installation
Poles description	1 x 3P: fixed INS250 source changeover vertical installation 1 x 4P: fixed INS250 source changeover vertical installation 1 x 3P: fixed INV250 source changeover vertical installation 1 x 4P: fixed INV250 source changeover vertical installation 1 x 3P: fixed NSX100...250 source changeover vertical installation 1 x 4P: fixed NSX100...250 source changeover vertical installation
Condition of using cable tie	Need additional plate (1M high) when installation of device is in vertical
Number of vertical modules [50 mm]	10 module(s): INS250 source changeover, front connection in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 10 module(s): INS250 source changeover, front connection in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure) 10 module(s): INV250 source changeover, front connection in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 10 module(s): INV250 source changeover, front connection in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure) 11 module(s): NSX100...250 source changeover, front connection in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 11 module(s): NSX100...250 source changeover, front connection in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
Standards	IEC 61439-2
Product certifications	ASTA

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Complementary

Cable entry	Cut-out plates 0.37 mm top or bottom 192 mm
Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	600 mm
Height	200 mm
Net weight	1.37 kg
Functional unit	<p>600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed direct front rotary handle vertical 3P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed direct front rotary handle vertical 3P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed direct front rotary handle vertical 4P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed direct front rotary handle vertical 4P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G floor-standing enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G floor-standing enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 0.37 mm</p> <p>600 mm PrismaSeT G floor-standing enclosure source changeover NSX100...250 source changeover fixed mechanical interlock vertical 3P 1 front connection 11 0.37 mm</p> <p>600 mm PrismaSeT G wall-mounted enclosure source changeover NSX100...250 source changeover fixed mechanical interlock vertical 3P 1 front connection 11 0.37 mm</p> <p>600 mm PrismaSeT G floor-standing enclosure source changeover NSX100...250 source changeover fixed mechanical interlock vertical 4P 1 front connection 11 0.37 mm</p>

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.3 cm
Package 1 Width	22.6 cm
Package 1 Length	47.3 cm
Package 1 Weight	1.403 kg
Unit Type of Package 2	S04
Number of Units in Package 2	14
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	20.259 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product