




The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

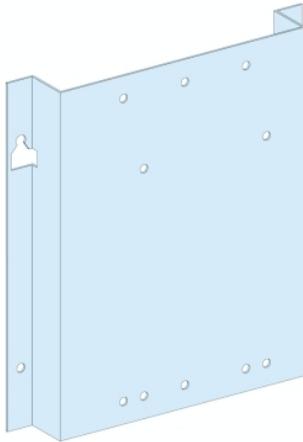

Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G duct
Installation description	Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm
Installed device	EasyPact: fixed CVS400 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle - vertical installation ComPact: fixed INS320...400 - control: direct front rotary handle - vertical installation ComPact: fixed INS500...630 - control: direct front rotary handle - vertical installation ComPact: fixed INV320...400 - control: direct front rotary handle - vertical installation ComPact: fixed INV500...630 - control: direct front rotary handle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle - vertical installation
Poles description	1 x 3P: fixed CVS400 vertical installation 1 x 4P: fixed CVS400 vertical installation 1 x 3P: fixed CVS630 vertical installation 1 x 4P: fixed CVS630 vertical installation 1 x 3P: fixed INS320...400 vertical installation 1 x 4P: fixed INS320...400 vertical installation 1 x 3P: fixed INS500...630 vertical installation 1 x 4P: fixed INS500...630 vertical installation 1 x 3P: fixed INV320...400 vertical installation 1 x 4P: fixed INV320...400 vertical installation 1 x 3P: fixed INV500...630 vertical installation 1 x 4P: fixed INV500...630 vertical installation 1 x 3P: fixed NSX400 vertical installation 1 x 4P: fixed NSX400 vertical installation 1 x 3P: fixed NSX630 vertical installation 1 x 4P: fixed NSX630 vertical installation
Condition of using cable tie	Need additional plate (1M high) when installation of device is in vertical

Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	300 mm
Height	350 mm

Net weight

0.78 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	22.0 cm
Package 1 Length	23.0 cm
Package 1 Weight	792.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	25
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	20.443 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product