


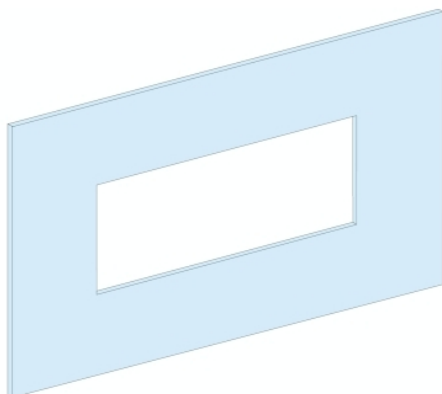

Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
Type of front plate	Cut-out
Installed device	ComPact: fixed INS250 source changeover - control: mechanical interlock - vertical installation ComPact: fixed INV250 source changeover - control: mechanical interlock - vertical installation
Poles description	1 x 3P: mounting plate support: INS250 source changeover vertical installation 1 x 4P: mounting plate support: INS250 source changeover vertical installation 2 x 3P: mounting plate support: INS250 source changeover vertical installation 2 x 4P: mounting plate support: INS250 source changeover vertical installation 1 x 3P: mounting plate support: INV250 source changeover vertical installation 1 x 4P: mounting plate support: INV250 source changeover vertical installation 2 x 3P: mounting plate support: INV250 source changeover vertical installation 2 x 4P: mounting plate support: INV250 source changeover vertical installation
Operating position	Vertical

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Connection position	Direct connection Front connection
Number of vertical modules [50 mm]	5
Standards	IEC 61439-1 IEC 61439-2
Product certifications	ASTA
Material	Steel
Surface finish	Matt Textured
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	250 mm
Width	500 mm
Net weight	0.76 kg

Quantity per set	Set of 1
Functional unit	650 mm 400 mm PrismaSeT P cubicle ComPact INS250 source changeover fixed mechanical interlock vertical 3P 2 direct 9 650 mm 400 mm PrismaSeT P cubicle ComPact INS250 source changeover fixed mechanical interlock vertical 4P 2 direct 9 650 mm 400 mm PrismaSeT P cubicle ComPact INV250 source changeover fixed mechanical interlock vertical 3P 2 direct 9 650 mm 400 mm PrismaSeT P cubicle ComPact INV250 source changeover fixed mechanical interlock vertical 4P 2 direct 9 600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 600 mm PrismaSeT G floor-standing enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 600 mm PrismaSeT G wall-mounted enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 600 mm PrismaSeT G floor-standing enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 600 mm PrismaSeT G wall-mounted enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3 cm
Package 1 Width	26.5 cm
Package 1 Length	51.5 cm
Package 1 Weight	762 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	17 cm
Package 2 Width	27 cm
Package 2 Length	53 cm
Package 2 Weight	7.861 kg
Unit Type of Package 3	S04
Number of Units in Package 3	10
Package 3 Height	30 cm
Package 3 Width	40 cm
Package 3 Length	60 cm
Package 3 Weight	8.591 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product