


LVS03243

Front plate, PrismaSeT P and G, for NSX/
CVS250 3P/4P, 5M, vertical, fixed, toggle/
Rotary handle, white, RAL 9003



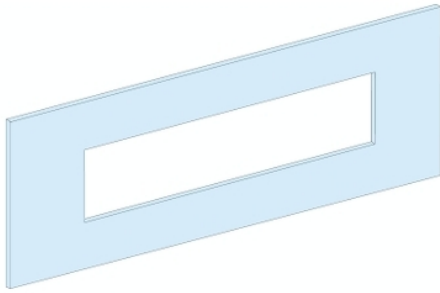

Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
Type of front plate	Cut-out
Installed device	ComPact: fixed NSX100...160 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX250 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - vertical installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation ComPact: drawout NSX100...160 without earth leakage protection - control: toggle - vertical installation ComPact: drawout NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism - vertical installation ComPact: drawout NSX250 without earth leakage protection - control: toggle - vertical installation ComPact: drawout NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX250 without earth leakage protection - control: motor mechanism - vertical installation ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism - vertical installation

Poles description	4 x 3P: mounting plate support: CVS100...160 vertical installation 3 x 4P: mounting plate support: CVS100...160 vertical installation 4 x 3P: mounting plate support: CVS250 vertical installation 3 x 4P: mounting plate support: CVS250 vertical installation 4 x 3P: mounting plate support: NSX100...160 vertical installation 3 x 4P: mounting plate support: NSX100...160 vertical installation 4 x 3P: mounting plate support: NSX250 vertical installation 3 x 4P: mounting plate support: NSX250 vertical installation 2 x 3P: mounting plate support: NSX100...160 vertical installation 2 x 4P: mounting plate support: NSX100...160 vertical installation 2 x 3P: mounting plate support: NSX250 vertical installation 2 x 4P: mounting plate support: NSX250 vertical installation
Operating position	Vertical

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Connection position	Linergy FC Direct connection
Number of vertical modules [50 mm]	5
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASTA
Material	Steel
Surface finish	Matt Textured
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	250 mm
Width	500 mm
Net weight	0.82 kg

Quantity per set	Set of 1
------------------	----------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	26.0 cm
Package 1 Length	51.0 cm
Package 1 Weight	834.0 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	16.5 cm
Package 2 Width	27.4 cm
Package 2 Length	52.7 cm
Package 2 Weight	8.537 kg
Unit Type of Package 3	P12
Number of Units in Package 3	270
Package 3 Height	94.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	242.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product