


Product data sheet

Characteristics

LVS03293

Front plate, PrismaSeT P and G, for Vigi NSX 100/250, 11M, vertical, toggle, W300, white, RAL 9003

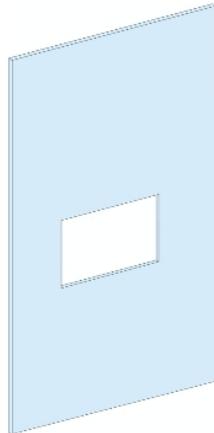

Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G duct PrismaSeT PrismaSeT P cubicle PrismaSeT PrismaSeT Pack 250 duct
Type of front plate	Cut-out
Installed device	ComPact: fixed NSX100...160 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX250 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX100...160 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX250 with earth leakage protection - control: toggle - vertical installation
Poles description	1 x 4P: mounting plate support: NSX100...160 vertical installation 1 x 4P: mounting plate support: NSX250 vertical installation 1 x 3P: mounting plate support: NSX100...160 vertical installation 1 x 3P: mounting plate support: NSX250 vertical installation
Operating position	Vertical

Complementary

Enclosure/cubicle description	Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm Cubicle duct - width 400 mm depth 400 mm Pack enclosure - width 300 mm
Connection position	Front connection Direct connection
Number of vertical modules [50 mm]	11
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASTA
Material	Steel
Surface finish	Textured Matt
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	550 mm
Width	300 mm
Net weight	1.16 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Quantity per set	Set of 1
Functional unit	300 mm PrismaSeT G floor-standing duct ComPact NSX100...160 with fixed toggle vertical 4P 1 direct 11 300 mm PrismaSeT G wall-mounted duct ComPact NSX100...160 with fixed toggle vertical 4P 1 direct 11 400 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed toggle vertical 3P 1 front connection 11 400 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed toggle vertical 4P 1 front connection 11 400 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in toggle vertical 3P 1 front connection 11 400 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in toggle vertical 4P 1 front connection 11 300 mm PrismaSeT G floor-standing duct ComPact NSX250 with fixed toggle vertical 4P 1 direct 11 300 mm PrismaSeT G wall-mounted duct ComPact NSX250 with fixed toggle vertical 4P 1 direct 11 400 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed toggle vertical 3P 1 front connection 11 400 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed toggle vertical 4P 1 front connection 11 400 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in toggle vertical 3P 1 front connection 11 400 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in toggle vertical 4P 1 front connection 11 300 mm PrismaSeT G floor-standing duct ComPact NSX100...160 with fixed toggle vertical 3P 1 direct with long terminal shield 13 300 mm PrismaSeT G wall-mounted duct ComPact NSX100...160 with fixed toggle vertical 3P 1 direct with long terminal shield 13 300 mm PrismaSeT G floor-standing duct ComPact NSX100...160 with fixed toggle vertical 4P 1 direct with long terminal shield 13 300 mm PrismaSeT G wall-mounted duct ComPact NSX100...160 with fixed toggle vertical 4P 1 direct with long terminal shield 13 300 mm Prisma Pack 250 Pack enclosure ComPact NSX100...160 with fixed toggle vertical 3P 1 direct with long terminal shield 13 300 mm Prisma Pack 250 Pack enclosure ComPact NSX100...160 with fixed toggle vertical 4P 1 direct with long terminal shield 13 300 mm PrismaSeT G wall-mounted duct ComPact NSX250 with fixed toggle vertical 3P 1 direct with long terminal shield 13 300 mm PrismaSeT G floor-standing duct ComPact NSX250 with fixed toggle vertical 4P 1 direct with long terminal shield 13 300 mm PrismaSeT G wall-mounted duct ComPact NSX250 with fixed toggle vertical 4P 1 direct with long terminal shield 13 300 mm Prisma Pack 250 Pack enclosure ComPact NSX250 with fixed toggle vertical 3P 1 direct with long terminal shield 13 300 mm Prisma Pack 250 Pack enclosure ComPact NSX250 with fixed toggle vertical 4P 1 direct with long terminal shield 13

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	26.5 cm
Package 1 Length	56.5 cm
Package 1 Weight	1.16 kg
Unit Type of Package 2	S04
Number of Units in Package 2	12
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	16.644 kg
Unit Type of Package 3	P12
Number of Units in Package 3	48
Package 3 Height	43.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	76.5 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
RoHS exemption information	<input checked="" type="checkbox"/> Yes
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product