


# Product data sheet

## Characteristics

# LVS03404

## Rail, PrismaSeT P, for adjustable modular device, W400mm

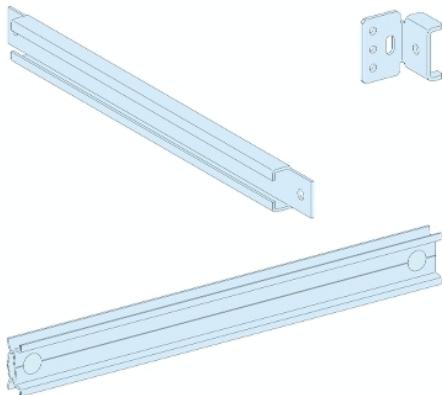

### Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Rail
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P
Type of rail	Modular Adjustable
Installed device	ComPact: fixed INS100 - control: direct front rotary handle - vertical installation ComPact: fixed INS160 - control: direct front rotary handle - vertical installation ComPact: fixed INS40 - control: direct front rotary handle - vertical installation ComPact: fixed INS63 - control: direct front rotary handle - vertical installation Acti 9: fixed modular device Multi9: fixed modular device Multi9: fixed NG125 without earth leakage protection - control: toggle ComPact: fixed INS125 - control: direct front rotary handle - vertical installation Acti 9: fixed modular device <= 40 A Multi9: fixed modular device <= 40 A ComPact: fixed NG160 without earth leakage protection - control: toggle ComPact: fixed NG160 NA without earth leakage protection - control: toggle ComPact: fixed NSA125...160 - control: toggle
Poles description	1 x 3P: fixed INS100 vertical installation 1 x 4P: fixed INS100 vertical installation 1 x 3P: fixed INS160 vertical installation 1 x 4P: fixed INS160 vertical installation 1 x 3P: fixed INS40 vertical installation 1 x 4P: fixed INS40 vertical installation 1 x 3P: fixed INS63 vertical installation 1 x 4P: fixed INS63 vertical installation 1 x 3P: fixed NG125 1 x 4P: fixed NG125 1 x 3P: fixed INS125 vertical installation 1 x 4P: fixed INS125 vertical installation 1 x 3P: fixed NG160 1 x 4P: fixed NG160 1 x 3P: fixed NG160 NA 1 x 4P: fixed NG160 NA 1 x 3P: fixed NSA125...160 1 x 4P: fixed NSA125...160

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Complementary

Installation description	Cubicle - width 400 mm depth 400 mm
Enclosure nominal height	2000 mm
Number of vertical modules [50 mm]	4 module(s): INS100, direct in 400 mm Widecubicle 5 module(s): INS100, direct in 400 mm Widecubicle 4 module(s): INS125, direct in 400 mm Widecubicle 5 module(s): INS125, direct in 400 mm Widecubicle 4 module(s): INS160, direct in 400 mm Widecubicle 5 module(s): INS160, direct in 400 mm Widecubicle 4 module(s): INS40, direct in 400 mm Widecubicle 4 module(s): INS63, direct in 400 mm Widecubicle 3 module(s): modular device <= 40 A, direct in 400 mm Widecubicle 4 module(s): modular device, direct in 400 mm Widecubicle 5 module(s): NG125 without earth leakage protection , direct in 400 mm Widecubicle 5 module(s): NG160 without earth leakage protection , direct in 400 mm Widecubicle 5 module(s): NG160 NA without earth leakage protection , direct in 400 mm Widecubicle 5 module(s): NSA125...160, direct in 400 mm Widecubicle
9 mm pitches	20
Quantity per set	Set of 1
Height	30 mm
Width	325 mm
Depth	325 mm
Net weight	0.76 kg
Colour	Natural
Material	Metal

## Environment

Standards	IEC 61439-1 IEC 61439-2
Product certifications	ASTA

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.500 cm
Package 1 Width	4.000 cm
Package 1 Length	36.000 cm
Package 1 Weight	769.000 g
Unit Type of Package 2	S04
Number of Units in Package 2	20
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	15.880 kg
Unit Type of Package 3	P12
Number of Units in Package 3	80
Package 3 Height	43.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	75.500 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
RoHS exemption information	<input checked="" type="checkbox"/> Yes
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product