


Product data sheet

Characteristics

LVS03405

Mounting plate, PrismaSeT P, for NSXm
3P/4P, vertical fixed, toggle/direct rotary
handle, 8M, W400mm

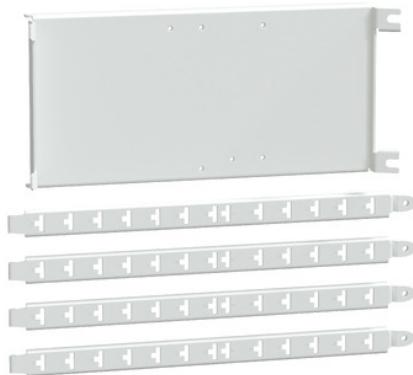

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Installation description	Cubicle - width 400 mm depth 400 mm
Mounting plate description	Dedicated
Installed device	ComPact: fixed NSXm without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSXm without earth leakage protection - control: direct rotary handle - vertical installation ComPact: fixed NSXm with earth leakage protection - control: toggle - vertical installation
Poles description	1 x 3P or 4P: fixed NSXm vertical installation
Number of vertical modules [50 mm]	8 module(s): NSXm without earth leakage protection , direct in 400 mm Widecubicle 8 module(s): NSXm with earth leakage protection , direct in 400 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	325 mm
Height	150 mm
Functional unit	400 mm 400 mm PrismaSeT P cubicle ComPact NSXm without fixed toggle vertical 3P or 4P 1 direct 8 162.5 mm 400 mm 400 mm PrismaSeT P cubicle ComPact NSXm without fixed direct rotary handle vertical 3P or 4P 1 direct 8 162.5 mm 400 mm 400 mm PrismaSeT P cubicle ComPact NSXm with fixed toggle vertical 3P or 4P 1 direct 8 162.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.300 cm
Package 1 Width	14.900 cm
Package 1 Length	37.500 cm
Package 1 Weight	1.493 kg
Unit Type of Package 2	S04
Number of Units in Package 2	10

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	15.729 kg
Unit Type of Package 3	P12
Number of Units in Package 3	120
Package 3 Height	102.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	200.000 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product