


LVS03413

Mounting plate, PrismaSeT P, for Vigi NSX/
CVS 3P 250A, horizontal plugin toggle/rot
handle/mot mech, 3M, W650



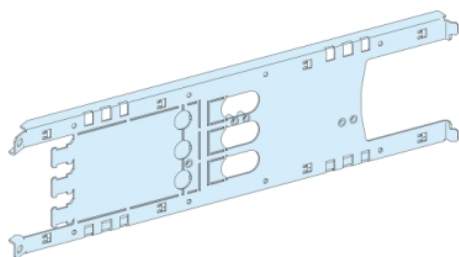

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm

Installed device	EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle - horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: motor mechanism - horizontal installation
Poles description	1 x 3P: fixed CVS100...160 horizontal installation 1 x 3P: fixed CVS250 horizontal installation 1 x 3P: fixed NSX100...160 horizontal installation 1 x 3P: fixed NSX250 horizontal installation 1 x 3P: plug-in NSX100...160 horizontal installation 1 x 3P: plug-in NSX250 horizontal installation

Number of vertical modules [50 mm]	3 module(s): CVS100...160 without earth leakage protection , direct in 650 mm Widecubicle 3 module(s): CVS250 without earth leakage protection , direct in 650 mm Widecubicle 3 module(s): NSX100...160 without earth leakage protection , direct in 650 mm Widecubicle 3 module(s): NSX250 without earth leakage protection , direct in 650 mm Widecubicle 3 module(s): CVS100...160 with earth leakage protection , direct in 650 mm Widecubicle 3 module(s): CVS250 with earth leakage protection , direct in 650 mm Widecubicle 3 module(s): NSX100...160 with earth leakage protection , direct in 650 mm Widecubicle 3 module(s): NSX250 with earth leakage protection , direct in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Textured Matt
Colour	White (RAL 9003)
Width	650 mm
Height	200 mm

Net weight	2.015 kg
Functional unit	650 mm 400 mm PrismaSeT P cubicle EasyPact CVS100...160 without fixed direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS250 without fixed direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without fixed direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without fixed motor mechanism horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in motor mechanism horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in toggle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without fixed direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without fixed motor mechanism horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in motor mechanism horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in toggle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS100...160 with fixed direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS250 with fixed direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed motor mechanism horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in motor mechanism horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in toggle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed motor mechanism horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in direct front rotary handle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in motor mechanism horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in toggle horizontal 3P 1 direct 3 12.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.6 cm
Package 1 Width	15.0 cm
Package 1 Length	57.3 cm
Package 1 Weight	2.051 kg
Unit Type of Package 2	S04
Number of Units in Package 2	5
Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	11.028 kg
Unit Type of Package 3	P12
Number of Units in Package 3	60
Package 3 Height	102.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	144.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product