


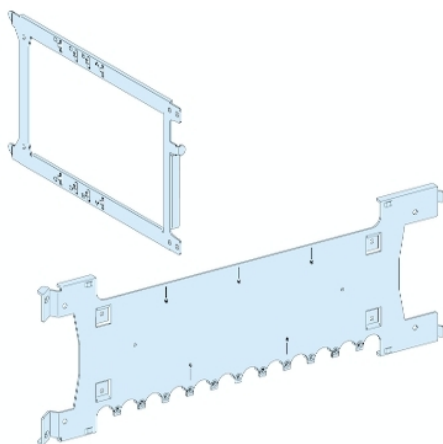

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm
Installed device	ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX100...160 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX250 with earth leakage protection - control: toggle - vertical installation
Poles description	4 x 3P: plug-in NSX100...160 vertical installation 3 x 4P: plug-in NSX100...160 vertical installation 4 x 3P: plug-in NSX250 vertical installation 3 x 4P: plug-in NSX250 vertical installation
Number of vertical modules [50 mm]	7 module(s): NSX100...160 without earth leakage protection , Linergy FC in 650 mm Widecubicle 8 module(s): NSX250 without earth leakage protection , Linergy FC in 650 mm Widecubicle 9 module(s): NSX100...160 with earth leakage protection , Linergy FC in 650 mm Widecubicle 10 module(s): NSX250 with earth leakage protection , Linergy FC in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	603 mm
Height	202 mm
Depth	372 mm

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Net weight	2.98 kg
Functional unit	650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in toggle vertical 3P 4 Linergy FC 7 87.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without plug-in toggle vertical 4P 3 Linergy FC 7 87.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in toggle vertical 3P 4 Linergy FC 8 62.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without plug-in toggle vertical 4P 3 Linergy FC 8 62.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in toggle vertical 3P 4 Linergy FC 9 87.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with plug-in toggle vertical 4P 3 Linergy FC 9 87.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in toggle vertical 3P 4 Linergy FC 10 87.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with plug-in toggle vertical 4P 3 Linergy FC 10 87.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.500 cm
Package 1 Width	21.300 cm
Package 1 Length	57.900 cm
Package 1 Weight	3.106 kg
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	18.960 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product