


LVS03451

Mounting plate, PrismaSeT P, for Vigi NSX/
CVS 3P 630A, horizontal fixed, toggle,
W650mm

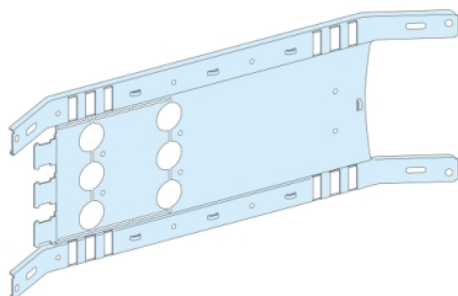

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm
Installed device	EasyPact: fixed CVS400 without earth leakage protection - control: toggle - horizontal installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle - horizontal installation EasyPact: fixed EZC400 - control: toggle - horizontal installation EasyPact: fixed EZC630 - control: toggle - horizontal installation ComPact: fixed NSX400 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: toggle - horizontal installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle - horizontal installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: toggle - horizontal installation
Poles description	1 x 3P: fixed CVS400 horizontal installation 1 x 3P: fixed CVS630 horizontal installation 1 x 3P: fixed EZC400 horizontal installation 1 x 3P: fixed EZC630 horizontal installation 1 x 3P: fixed NSX400 horizontal installation 1 x 3P: fixed NSX630 horizontal installation
Number of vertical modules [50 mm]	4 module(s): CVS400 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS630 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): EZC400, direct in 650 mm Widecubicle 4 module(s): EZC630, direct in 650 mm Widecubicle 4 module(s): NSX400 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX630 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS400 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS630 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX400 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX630 with earth leakage protection , direct in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASTA

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Textured Matt
Colour	White (RAL 9003)
Width	650 mm
Height	200 mm
Net weight	1.48 kg
Functional unit	650 mm 400 mm PrismaSeT P cubicle EasyPact CVS400 without fixed toggle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS630 without fixed toggle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact EZC400 fixed toggle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact EZC630 fixed toggle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without fixed toggle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without fixed toggle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS400 with fixed toggle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS630 with fixed toggle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed toggle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed toggle horizontal 3P 1 direct 4 12.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.8 cm
Package 1 Width	19.5 cm
Package 1 Length	57.5 cm
Package 1 Weight	1.475 kg
Unit Type of Package 2	CAR
Number of Units in Package 2	5
Package 2 Height	31.5 cm
Package 2 Width	22.5 cm
Package 2 Length	59.0 cm
Package 2 Weight	7.854 kg
Unit Type of Package 3	P12
Number of Units in Package 3	70
Package 3 Height	77.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	121.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration

RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product