


LVS03454

Mounting plate, PrismaSeT P, for Vigi NSX/
CVS 4P 630A, horizontal plugin toggle/rot
handle/mot mech, W650mm



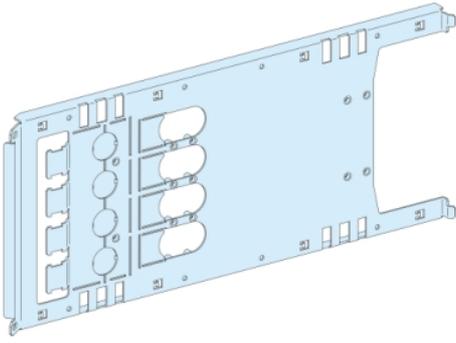

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm

Installed device	<p>EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX400 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX630 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>EasyPact: fixed CVS400 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>EasyPact: fixed CVS630 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX400 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX400 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX400 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX400 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX630 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX630 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX630 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX630 with earth leakage protection - control: motor mechanism - horizontal installation</p>
Poles description	<p>1 x 4P: fixed CVS400 horizontal installation</p> <p>1 x 4P: fixed CVS630 horizontal installation</p> <p>1 x 4P: fixed NSX400 horizontal installation</p> <p>1 x 4P: fixed NSX630 horizontal installation</p> <p>1 x 4P: plug-in NSX400 horizontal installation</p> <p>1 x 4P: plug-in NSX630 horizontal installation</p>

Number of vertical modules [50 mm]	<p>4 module(s): NSX400 without earth leakage protection , direct in 650 mm Widecubicle</p> <p>4 module(s): NSX630 without earth leakage protection , direct in 650 mm Widecubicle</p> <p>4 module(s): NSX400 with earth leakage protection , direct in 650 mm Widecubicle</p> <p>4 module(s): NSX630 with earth leakage protection , direct in 650 mm Widecubicle</p> <p>5 module(s): CVS400 without earth leakage protection , direct in 650 mm Widecubicle</p> <p>5 module(s): CVS630 without earth leakage protection , direct in 650 mm Widecubicle</p> <p>5 module(s): NSX400 without earth leakage protection , direct in 650 mm Widecubicle</p> <p>5 module(s): NSX630 without earth leakage protection , direct in 650 mm Widecubicle</p> <p>5 module(s): CVS400 with earth leakage protection , direct in 650 mm Widecubicle</p> <p>5 module(s): CVS630 with earth leakage protection , direct in 650 mm Widecubicle</p> <p>5 module(s): NSX400 with earth leakage protection , direct in 650 mm Widecubicle</p> <p>5 module(s): NSX630 with earth leakage protection , direct in 650 mm Widecubicle</p>
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	650 mm
Height	250 mm

Net weight	2.96 kg
Functional unit	650 mm 400 mm PrismaSeT P cubicle EasyPact CVS400 without fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS630 without fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without fixed motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without plug-in direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 without plug-in motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without fixed motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without plug-in direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 without plug-in motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS400 with fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle EasyPact CVS630 with fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed motor mechanism horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in direct front rotary handle horizontal 4P 1 direct 5 12.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in motor mechanism horizontal 4P 1 direct 5 12.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.600 cm
Package 1 Width	24.700 cm
Package 1 Length	58.000 cm
Package 1 Weight	2.994 kg
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	19.760 kg
Unit Type of Package 3	P12
Number of Units in Package 3	72
Package 3 Height	103.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	235.000 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product