


LVS03666

Front plate, PrismaSeT P, for 2 x Vigi NSX 630, vertical, fixed, toggle/plug-in/rotary handle, white, RAL 9003

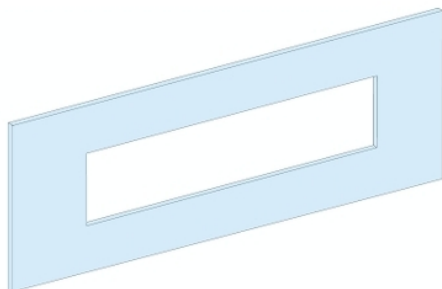

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle
Type of front plate	Cut-out
Installed device	ComPact: fixed NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX400 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: drawout NSX400 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX400 with earth leakage protection - control: motor mechanism - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX630 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: drawout NSX630 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX630 with earth leakage protection - control: motor mechanism - vertical installation
Poles description	2 x 3P: mounting plate support: NSX400 vertical installation 2 x 4P: mounting plate support: NSX400 vertical installation 2 x 3P: mounting plate support: NSX630 vertical installation 2 x 4P: mounting plate support: NSX630 vertical installation
Operating position	Vertical

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Complementary

Enclosure/cubicle description	Cubicle - width 650 mm depth 400 mm
Connection position	Linergy FC Direct connection
Number of vertical modules [50 mm]	9
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASTA
Material	Steel
Surface finish	Textured Matt
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	450 mm
Width	500 mm
Net weight	1.6 kg
Quantity per set	Set of 1
Functional unit	650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed toggle vertical 3P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed toggle vertical 4P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in toggle vertical 3P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in toggle vertical 4P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed direct front rotary handle vertical 3P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with fixed direct front rotary handle vertical 4P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in direct front rotary handle vertical 3P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with plug-in direct front rotary handle vertical 4P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with drawout toggle vertical 3P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with drawout toggle vertical 4P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with drawout direct front rotary handle vertical 3P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with drawout direct front rotary handle vertical 4P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with drawout motor mechanism vertical 3P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX400 with drawout motor mechanism vertical 4P 2 direct 13 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed toggle vertical 3P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed toggle vertical 4P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in toggle vertical 3P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in toggle vertical 4P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed direct front rotary handle vertical 3P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with fixed direct front rotary handle vertical 4P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in direct front rotary handle vertical 3P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with plug-in direct front rotary handle vertical 4P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with drawout toggle vertical 3P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with drawout toggle vertical 4P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with drawout direct front rotary handle vertical 3P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with drawout direct front rotary handle vertical 4P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with drawout motor mechanism vertical 3P 2 direct 15 650 mm 400 mm PrismaSeT P cubicle ComPact NSX630 with drawout motor mechanism vertical 4P 2 direct 15

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3 cm
Package 1 Width	46.4 cm
Package 1 Length	51 cm
Package 1 Weight	1.575 kg
Unit Type of Package 2	BB1
Number of Units in Package 2	6
Package 2 Height	11.4 cm
Package 2 Width	52.5 cm
Package 2 Length	53.5 cm
Package 2 Weight	10.012 kg
Unit Type of Package 3	P12
Number of Units in Package 3	12
Package 3 Height	24 cm
Package 3 Width	80 cm
Package 3 Length	120 cm
Package 3 Weight	31.5 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product