


# LVS03911

Front plate, PrismaSeT P and G, for Power meter/other devices 96x96 with 3 cut out, 3M, W600, white, RAL 9003

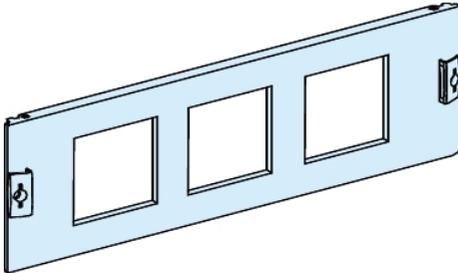

## Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P cubicle
Type of front plate	Cut-out
Type of front plate	Cut-out
Installed device	Vigilohm: IM20 Vigilohm: IM20H Human-switchboard interface: 96 x 96 mm device Human-switchboard interface: HSI PowerLogic: PM400...800 Vigilohm: IM10 Vigilohm: IM10H Enerlin'X: FDM121

## Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Number of vertical modules [50 mm]	3
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASTA
Material	Steel
Surface finish	Matt Textured
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9003)
Height	150 mm
Width	500 mm
Net weight	0.46 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Quantity per set	Set of 1
Functional unit	600 mm PrismaSeT G floor-standing enclosure human-switchboard interface 96 x 96 mm device 3 3 600 mm PrismaSeT G wall-mounted enclosure human-switchboard interface 96 x 96 mm device 3 3 650 mm 400 mm PrismaSeT P cubicle human-switchboard interface 96 x 96 mm device 3 3 600 mm PrismaSeT G floor-standing enclosure human-switchboard interface HSI 3 3 600 mm PrismaSeT G wall-mounted enclosure human-switchboard interface HSI 3 3 650 mm 400 mm PrismaSeT P cubicle human-switchboard interface HSI 3 3 600 mm PrismaSeT G floor-standing enclosure PowerLogic 3 3 600 mm PrismaSeT G wall-mounted enclosure PowerLogic 3 3 650 mm 400 mm PrismaSeT P cubicle PowerLogic 3 3 650 mm 400 mm PrismaSeT P cubicle Vigilohm 3 3 600 mm PrismaSeT G floor-standing enclosure Enerlin'X FDM121 3 3 600 mm PrismaSeT G wall-mounted enclosure Enerlin'X FDM121 3 3 650 mm 400 mm PrismaSeT P cubicle Enerlin'X FDM121 3 3

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.000 cm
Package 1 Width	16.500 cm
Package 1 Length	51.500 cm
Package 1 Weight	499.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	16.500 cm
Package 2 Width	17.500 cm
Package 2 Length	53.000 cm
Package 2 Weight	5.197 kg
Unit Type of Package 3	P12
Number of Units in Package 3	90
Package 3 Height	30.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	58.500 kg

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 Yes
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product