


LVS04460

UNIVERSAL CONNECTION TRANSFERT IN DUCT 630A 4P

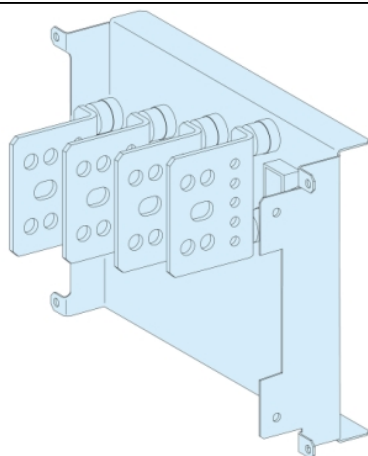

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Connection transfer assembly
Product name	PrismaSeT PrismaSeT P enclosure
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Product certifications	ASTA

Complementary

Cubicle-device connection	Connection transfer assembly
Poles description	4P
Installation description	Cubicle - width 650 mm
Installed device	EasyPact: fixed CVS400 without earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX400 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX630 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX630 with earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX400 with earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX630 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX400 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX400 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX630 without earth leakage protection - control: motor mechanism horizontal installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS400 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS630 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX400 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX400 with earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX630 with earth leakage protection - control: direct front rotary handle horizontal installation

[I _e] rated operational current	630 A
Busbar cross section	32 x 6 mm
Height	250 mm
Net weight	3.82 kg

Quantity per set	Set of 1
------------------	----------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.0 cm
Package 1 Width	27.0 cm
Package 1 Length	40.0 cm
Package 1 Weight	3.791 kg
Unit Type of Package 2	P12
Number of Units in Package 2	27
Package 2 Height	60.0 cm
Package 2 Width	80.0 cm
Package 2 Length	120.0 cm
Package 2 Weight	113.5 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes