


LVS08766D

Side panel, PrismaSeT P Active, W650mm, D600mm, IP55, set of 2 (left/right), with wireless Panel Server

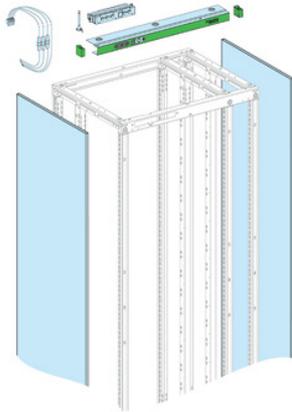

Main

| | |
|-------------------------------|---|
| Range | PrismaSeT |
| Range of product | PrismaSeT P Active |
| Product or component type | Side panel |
| Range compatibility | PrismaSeT PrismaSeT P Active enclosure PowerLogic PowerLogic HeatTag smart sensor PowerLogic PowerLogic PowerTag energy sensor |
| Device application | Low voltage electrical distribution Basic energy metering Preventive maintenance |
| Enclosure type | Metal enclosure Indoor enclosure |
| Installation description | Cubicle - width 650 mm, depth 600 mm |
| Kit composition | 2 side panel Quarter-turn fasteners 1 wireless panel server Antenna with cable 2 m Wiring kit for panel server |
| Alarm function | Cable overheating Power availability |
| Communication port protocol | LoRa, connection to cloud Bluetooth, connection to mobile Wireless, connection to sensors |
| Maximum number of connections | 15 |
| Sensor type | Cable overheating sensor 3 maximum Energy sensor 7 maximum |
| Upstream connectivity | LoRaWAN |
| Transmission support medium | Radio frequency 2.4...2.4835 GHz |
| Local signalling | Voltage indication: 3 LEDs (white) LoRa status: 1 LED (green and orange) Bluetooth status: 1 LED (blue) |
| Control type | Push-button (factory reset) Push-button (reboot) |
| Software designation | EcoStruxure Facility Expert |
| Commissioning interface | EcoStruxure Power Commission Mobile |
| Standards | IEC 61439-1 for enclosure IEC 61439-2 for enclosure IEC 61010 for wireless panel server IEC 61326-1 for wireless panel server IEC 62974-1 for wireless panel server IEC 62443-3-3: SL1 for wireless panel server |
| Product certifications | ASTA |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Complementary

| | |
|-----------------------------|--|
| Electrical insulation class | Class II for wireless panel server |
| Material | Treated sheet steel |
| Protective treatment | Electrophoresis treatment and hot-polymerised polyester epoxy powder |
| Surface finish | Matt Textured |
| Colour | White (RAL 9003) |
| [Us] rated supply voltage | 400 V AC at 50/60 Hz, 3 phases + neutral |
| Supply voltage limits | 400 V (+ 10 % - 15 %) |
| Maximum supply current | 10 mA |
| Power consumption in VA | 8 VA |
| Overvoltage category | IV |
| Location of connection | Downstream Upstream with additional protection |
| Protection type | Fuse protection integrated in power supply cable kit |
| Width | 600 mm |
| Height | 2000 mm |
| Net weight | 34.8 kg |
| Quantity per set | Set of 2 |

Environment

| | |
|---------------------------------------|--|
| IP degree of protection | IP55 for enclosure IP55 for wireless panel server |
| IK degree of protection | IK10 |
| Pollution degree | 3 for wireless panel server |
| Ambient air temperature for storage | -40...85 °C for wireless panel server |
| Ambient air temperature for operation | -25...70 °C for wireless panel server |
| Operating altitude | 0...2000 m for wireless panel server |
| Relative humidity | 93 % at 40 °C for wireless panel server |

Packing Units

| | |
|------------------------------|------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 8.000 cm |
| Package 1 Width | 68.000 cm |
| Package 1 Length | 206.000 cm |
| Package 1 Weight | 37.300 kg |
| Unit Type of Package 2 | PAL |
| Number of Units in Package 2 | 10 |
| Package 2 Height | 96.000 cm |
| Package 2 Width | 120.000 cm |
| Package 2 Length | 206.000 cm |
| Package 2 Weight | 399.000 kg |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Compliant with Exemptions |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |

| | |
|----------|---|
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free | Yes |
