



**Main**

|  |                                  |
|--|----------------------------------|
| Range of product                             | Harmony Electromechanical Relays |
| Series name                                  | Miniature                        |
| Product or component type                    | Plug-in relay                    |
| Device short name                            | RXM                              |
| Contacts type and composition                | 2 C/O                            |
| [Uc] control circuit voltage                 | 48 V AC 50/60 Hz                 |
| [Ithe] conventional enclosed thermal current | 12 A at -40...55 °C              |
| Status LED                                   | With                             |
| Control type                                 | Lockable test button             |
| Utilisation coefficient                      | 20 %                             |

**Complementary**

|  |   |
|--|---|
| Shape of pin                           | Flat  |
| [Ui] rated insulation voltage          | 250 V conforming to IEC<br>300 V conforming to CSA<br>300 V conforming to UL  |
| [Uimp] rated impulse withstand voltage | 4 kV during 1.2/50 µs   |
| Contacts material                      | AgNi  |
| [Ie] rated operational current         | 12 A at 28 V (DC) NO conforming to IEC<br>12 A at 250 V (AC) NO conforming to IEC<br>6 A at 28 V (DC) NC conforming to IEC<br>6 A at 250 V (AC) NC conforming to IEC<br>12 A at 28 V (DC) conforming to UL<br>12 A at 277 V (AC) conforming to UL |
| Maximum switching voltage              | 250 V conforming to IEC   |
| Resistive rated load                   | 12 A at 250 V AC<br>12 A at 28 V DC   |
| Maximum switching capacity             | 3000 VA/336 W   |
| Minimum switching capacity             | 170 mW at 10 mA, 17 V   |
| Operating rate                         | <= 1200 cycles/hour under load<br><= 18000 cycles/hour no-load  |
| Mechanical durability                  | 10000000 cycles   |
| Electrical durability                  | 100000 cycles for resistive load  |
| Average coil consumption in VA         | 1.2 at 60 Hz  |
| Average consumption                    | 1.2 VA at 60 Hz   |
| Drop-out voltage threshold             | >= 0.15 Uc  |
| Operate time                           | 20 ms   |
| Release time                           | 20 ms   |
| Average coil resistance                | 710 Ohm at 20 °C +/- 15 %   |
| Rated operational voltage limits       | 38.4...52.8 V AC  |
| Safety reliability data                | B10d = 100000   |
| Protection category                    | RT I  |
| Test levels                            | Level A group mounting  |
| Operating position                     | Any position  |
| CAD overall height                     | 79 mm   |

|                     |                  |
|---------------------|------------------|
| CAD overall depth   | 78.45 mm         |
| Net weight          | 0.037 kg         |
| Device presentation | Complete product |

## Environment

|                                       |   |
|---------------------------------------|---|
| Dielectric strength                   | 1300 V AC between contacts with micro disconnection<br>2000 V AC between coil and contact<br>2000 V AC between poles                      |
| Product certifications                | UL<br>CSA<br>CE<br>GOST<br>Lloyd's  |
| Standards                             | UL 508<br>EN/IEC 61810-1<br>CSA C22.2 No 14   |
| Ambient air temperature for storage   | -40...85 °C   |
| Ambient air temperature for operation | -40...55 °C   |
| Vibration resistance                  | 3 gn, amplitude = +/- 1 mm (f = 10...150 Hz) 5 cycles in operation<br>5 gn, amplitude = +/- 1 mm (f = 10...150 Hz) 5 cycles not operating |
| IP degree of protection               | IP40 conforming to EN/IEC 60529   |
| Shock resistance                      | 10 gn for in operation<br>30 gn for not operating   |
| Pollution degree                      | 3   |

## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.035 kg |
| Package 1 Height | 0.280 dm |
| Package 1 width  | 0.210 dm |
| Package 1 Length | 0.470 dm |

## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           |  <a href="#">REACH Declaration</a>  |
| REACH free of SVHC         | Yes  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes  |
| Mercury free               | Yes  |
| RoHS exemption information |  Yes  |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>   |
| Environmental Disclosure   |  <a href="#">Product Environmental Profile</a>  |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins  |


## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


---

Dimensions

---

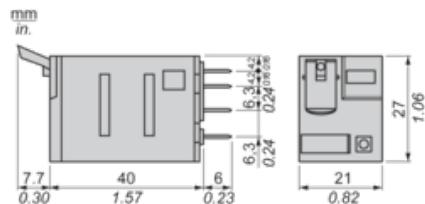


Pin Side View



---

### Wiring Diagram

---

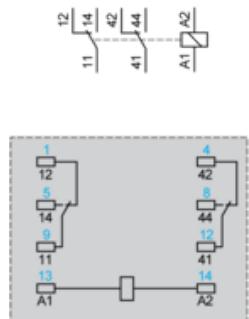


Symbols shown in blue correspond to Nema marking.

### Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.

Resistive AC load

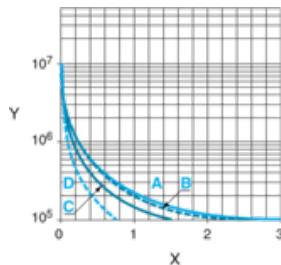

X Switching capacity (kVA)

Y Durability (Number of operating cycles)


A RXM2AB...

B RXM3AB...

C RXM4AB...


D RXM4GB...

Reduction coefficient for inductive AC load (depending on power factor  $\cos \phi$ )

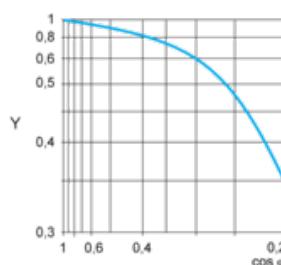

Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load

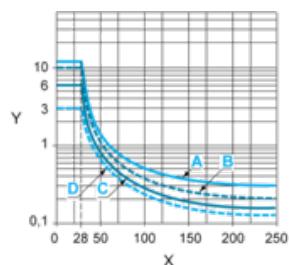

X Voltage DC

Y Current DC

A RXM2AB...

B RXM3AB...

C RXM4AB...

D RXM4GB...

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.