



Main

Range of product	Modicon Momentum automation platform
Product or component type	Analogue,discrete I/O base
Group of channels	1 group of 8 discrete outputs 2 groups of 4 discrete inputs 1 group of 6 analog inputs 1 group of 4 analog outputs
Analogue input range	0...10 V
Analogue input type	Single ended
Analogue input resolution	14 bits 0...10 V
Discrete input voltage	24 V DC
Analogue output range	0...10 V 14 bits
Discrete output voltage	10...30 V
Output short-circuit protection	With discrete output
Output overload protection	With discrete output

Complementary

Discrete input number	8 conforming to IEC 1131-2 Type 2
[Us] rated supply voltage	24 V (19.2...30 V)DC
Maximum analogue input voltage	15 V
Input voltage limits	3...32 V
Discrete input logic	Positive
Voltage state 0 guaranteed	<= 5 V for discrete input
Voltage state 1 guaranteed	>= 11 V for discrete input
Current state 0 guaranteed	<= 2 mA (discrete input)
Current state 1 guaranteed	>= 6 mA (discrete input)
Input overvoltage protection	45 V 10 s discrete input
Input resistance	1 MOhm analogue input circuit
Output load	>= 2 kOhm 0...10 V analogue output
Conversion time	0.75 Ms analogue input circuit 1.2 ms analogue output
Conversion error	+/- 0.4 % 0...10 V 25 °C analogue output 0,002 0...10 V 25 °C analogue input circuit
Fail state	For analogue output: hold For analogue output: reset to zero
Discrete output type	Transistor
Discrete output logic	Positive
Discrete output current	2 A per group 2 A per module 0.25 A per point
Maximum leakage current	0.4 mA DC 30 V discrete output
Maximum voltage drop	<0.4 V 0.25 A at state on discrete output
Surge current	2.5 A 1 ms discrete output
Response time	1.05 ms from state 1 to state 0 for discrete output 1.2 ms from state 0 to state 1 for discrete input 1.2 ms from state 0 to state 1 for discrete output 1.2 ms from state 1 to state 0 for discrete input

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Isolation voltage	500 V (duration = 1 min) between analogue I/O and operating voltage 500 V (duration = 1 min) between operating voltage and I/O from ground
Maximum power dissipation in W	6 W
Marking	CE
Local signalling	4 LEDs for channel status
Electrical connection	2 connectors for removable terminal blocks
Current consumption	400 mA at 24 V DC
Depth	47.5 mm
Height	125 mm
Width	141.5 mm
Net weight	0.24 kg

Environment

Product certifications	UL CSA
Protective treatment	TC
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	384 g
Package 1 Height	5.5 cm
Package 1 width	18 cm
Package 1 Length	26 cm
Unit Type of Package 2	S03
Number of Units in Package 2	10
Package 2 Weight	4.281 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty


Warranty	18 months
----------	-----------

Standard Adapter on a Typical Base

Dimensions




Mounting on a Wall




External Wiring Diagrams

Discrete I/O Devices

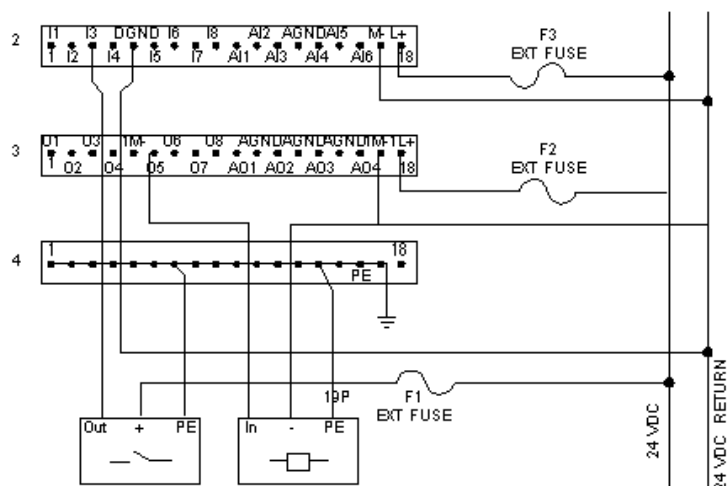

F1, 1 A fuse
F3
F2 2.5 A fuse


Analog I/O Devices

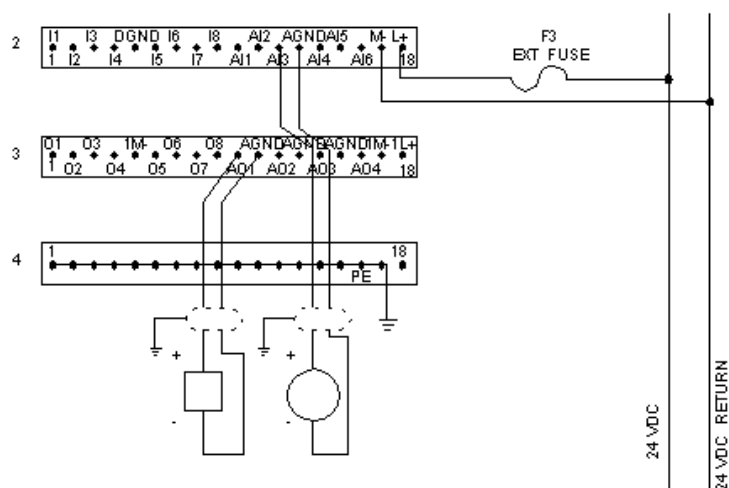

F3 1 A fuse

Internal Pin Connections

Rows 2 and 3 show the internal connections between terminals on the I/O base. Rows 4 through 6 show the internal connections on the optional busbar.

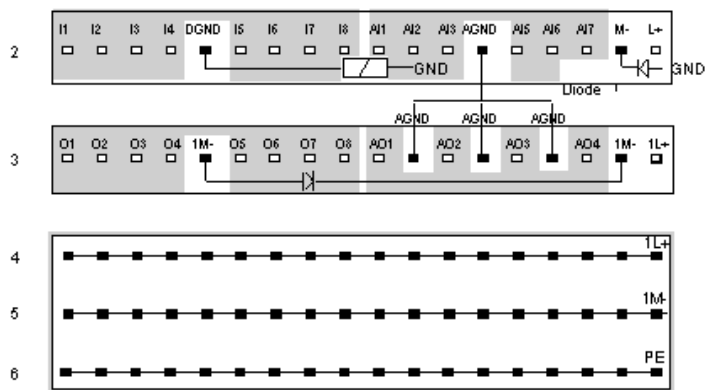

NOTE: AGND and DGND are separated inside the module. External digital inputs must be returned to the DGND terminal. External analog circuits must be returned to AGND terminals.