



### Main

Range of product	Interface for discrete signals
Product or component type	Slim electromechanical output interface module
Contacts type and composition	1 NO
[Uc] control circuit voltage	24 V
Control circuit type	DC
Width pitch dimension	12 mm
Maximum [In] rated current	18 mA
Reverse polarity protection	With
Short-circuit protection	6.3 A external fuse fast blow (Ik <= 1 kA AC and Ik <= 100 A DC)
[Ith] conventional free air thermal current	5 A conforming to IEC 60947-1
Sale per indivisible quantity	5

### Complementary

Control circuit voltage limits	28.8 V energization threshold: 14.5 V
Connections - terminals	Screw clamp terminal
Drop-out voltage	2 V
Holding current	1.3 mA
Power dissipation in W	0.43 W
Maximum switching voltage	150 V DC 250 V AC
[Ue] rated operational voltage	<= 120 V DC conforming to IEC 60947-5-1 <= 230 V AC conforming to IEC 60947-5-1
Network frequency	50/60 Hz
[Ie] rated operational current	1 A AC-14 Ue: 230 V per 1000000 cycles conforming to IEC 60947-5-1 1 A AC-15 Ue: 230 V per 1000000 cycles conforming to IEC 60947-5-1 3 A AC-12 Ue: 230 V per 1000000 cycles conforming to IEC 60947-5-1 1.5 A DC-13 Ue: 24 V per 1000000 cycles conforming to IEC 60947-5-1 1.7 A DC-12 Ue: 24 V per 1000000 cycles conforming to IEC 60947-5-1
Minimum switching current	5 mA
Minimum switching voltage	5 V
Electrical reliability	<= 0.00000001
Operating time	<= 10 ms between energisation of coil and closing of NO contact DC <= 5 ms between de-energisation of coil and closing of NO contact DC
Contact bounce time	<= 5 ms
Operating rate in Hz	10 Hz at no-load 0.5 Hz at Ie
Mechanical durability	10000000 cycles
[Ui] rated insulation voltage	250 V conforming to VDE 0110 group C 300 V conforming to IEC 60947-1
Flame retardance	V0 conforming to UL 94
Cable cross section	0.34...2.5 Mm <sup>2</sup> , 1 or 2 wires flexible with cable end 0.6...2.5 Mm <sup>2</sup> , 1 or 2 wires flexible without cable end 0.27...4 mm <sup>2</sup> , 1 wire rigid
Operating position	Any position

Installation category	II conforming to IEC 60947-1
Mounting support	Symmetrical DIN rail Asymmetrical DIN rail Combination rail
Net weight	0.04 kg

## Environment

Immunity to microbreaks	5 ms
Dielectric strength	1000 V for 1 minute between open contacts 2500 V for 1 minute between wired interface and earth 4000 V for 1 minute between coil circuit and contact circuits
Standards	IEC 60947-5-1
Product certifications	BV CSA DNV LROS (Lloyds register of shipping) UL
IP degree of protection	IP20 conforming to IEC 60529
Protective treatment	TC
Fire resistance	960 °C conforming to IEC 60695-2-1
Shock resistance	30 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	3 gn conforming to IEC 60068-2-6 (f = 10...150 Hz)
Electromagnetic compatibility	Electromagnetic field immunity test: level 3 10 V/m between 27...1000 MHz conforming to IEC 61000-4-3 Electrostatic discharge immunity test: level 3 8 kV conforming to IEC 61000-4-2 Fast transients immunity test: level 3 on input/output 1 kV conforming to IEC 61000-4-4 Fast transients immunity test: level 3 on power supply 2 kV conforming to IEC 61000-4-4 1.2/50 µs shock waves immunity test conforming to IEC 60947-1
Ambient air temperature for operation	-25...55 °C at Us -25...70 °C at Us with 8 mm space between ABR2S1... -5...40 °C unrestricted operation -5...55 °C from 0.85...1.1 Us
Ambient air temperature for storage	-40...80 °C
Operating altitude	<= 3000 m
Pollution degree	2 conforming to IEC 60947-1

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	47 g
Package 1 Height	7 cm
Package 1 width	9 cm
Package 1 Length	11.7 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Weight	237 g
Package 2 Height	7 cm
Package 2 width	9 cm
Package 2 Length	11.7 cm
Unit Type of Package 3	S02
Number of Units in Package 3	75
Package 3 Weight	3.946 kg
Package 3 Height	15 cm
Package 3 width	30 cm
Package 3 Length	40 cm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Contractual warranty


Warranty	18 months
----------	-----------

---

Slim Electromechanical Interface Module

---


Dimensions

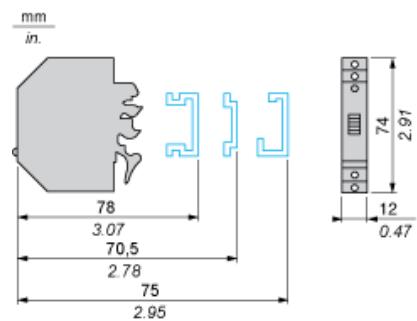

## Slim Electromechanical Interface Module

## Example of Application with PLC

## Interfacing PLC discrete outputs

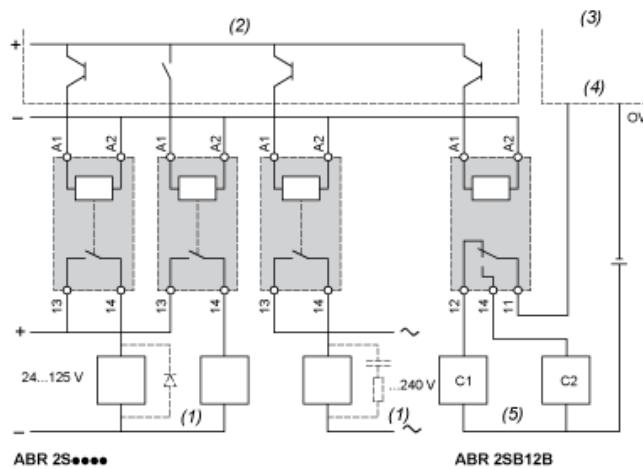


- (1) Essential on inductive loads (can be replaced with peak limiter)
- (2) PLC positive logic transistor (or relay) outputs
- (3) PLC analog inputs
- (4) Channel X
- (5) Analog sensors

Slim Electromechanical Interface Module

## Circuit Diagram

1 N/O




## Electrical Durability of Contacts

### AC Loads

Test conditions: in accordance with standard IEC 947-5-1 set up for rated control voltage.


AC-12 operating cycles in millions

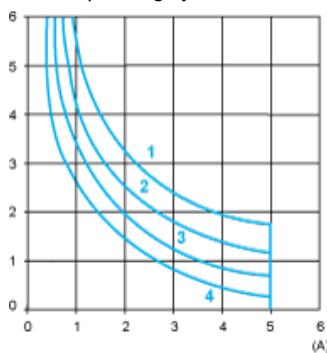

AC-12 Control of resistive loads and isolated solid state loads via optocoupler ( $\cos \phi \geq 0.9$ )

- (1) 24 V
- (2) 48 V
- (3) 115 V
- (4) 230 V

AC-14 and AC-15 operating cycles in millions

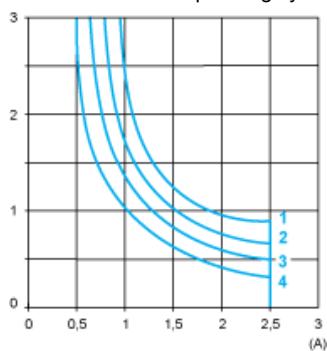

AC-14 Control of weak electro-magnetic loads of electro-magnets  $\leq 72$  VA (make:  $\cos \phi = 0.3$ , break:  $\cos \phi = 0.3$ )


AC-15 Control of electro-magnetic loads of electro-magnets  $> 72$  VA (make:  $\cos \phi = 0.7$ , break:  $\cos \phi = 0.4$ )

- (1) 24 V
- (2) 48 V
- (3) 115 V
- (4) 230 V

### DC Loads

Test conditions: in accordance with standard IEC 947-5-1 set up for rated control voltage.


DC-12 operating cycles in millions

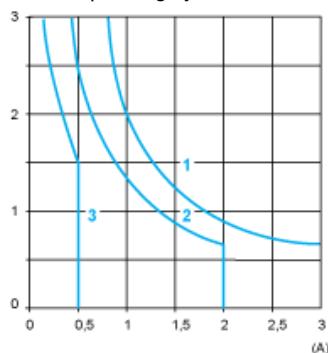

DC-13 Control of resistive loads and isolated solid state loads via optocoupler ( $L/R \leq 1$  ms)

- (1) 24 V
- (2) 48 V
- (3) 115 V

DC-13 operating cycles in millions

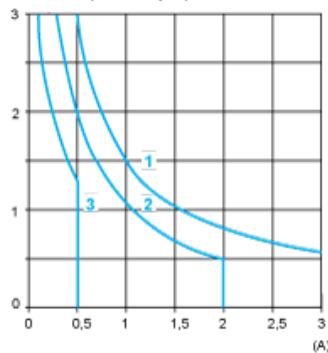

DC-13 Control of electro-magnets ( $L/R \leq 2 \times (U_e \times I_e)$  in ms, with  $U_e$ : rated operating voltage and  $I_e$ : rated operating current, with a load protection diode)

- (1) 24 V
- (2) 48 V
- (3) 115 V