



Main

Range of product	Modicon M171/M172
Product or component type	Additional I/O module
Product specific application	HVAC and pumping solution
Total inputs/outputs	27
Discrete input number	8
Discrete output number	3 for relay outputs SPST with same common 2 for relay outputs SPST with same common 2 for relay outputs SPDT with independent common
Discrete output current	8 A for relay SPDT 5 A for relay SPST
Analogue input number	2 analog input NTC 4 configurable
Analogue output number	3 voltage/current, range: 4...20 mA or 0...10 V 2 open collector, range: 1 kHz, 12 V, 35 mA

Complementary

Number of port	1 CAN port - screw terminal block
Input/output number	6 analog input(s) 5 analog output(s) 8 digital input(s) 7 digital output(s) 1 high-speed counter(s)
Discrete input logic	Sink or source (positive/negative)
Discrete input voltage	24 V AC/DC 48 V DC
Discrete input current	2.5 mA
Input impedance	20 kOhm
Analogue input type	Voltage 0...5 V (ratiometric) Current 4...20 mA Impedance 0...1500 hOhm Impedance 0...300 daOhm Direct input NTC temperature probe - 50...110 °C - resolution: 0.1 °C (extended) Voltage 0...10 V Pt 1000 temperature probe - 200...800 °C - resolution: 0.1 °C NTC temperature probe - 40...150 °C - resolution: 0.1 °C
Sensor power supply	5 V DC at 50 mA 12 V DC at 150 mA
[Us] rated supply voltage	24 V AC 48 V
Realtime clock	Without clock at -20...55 °C
Display type	Without display
Overvoltage category	II
Mounting support	DIN rail
Width	140 mm
Height	110 mm
Depth	61.6 mm
Net weight	0.19 kg

Environment

Directives	86/188/EEC - physical agents (noise) directive 2006/95/EC - low voltage directive
Standards	EN/IEC 60730
Product certifications	CE CURus EAC CSA
Ambient air temperature for operation	-20...55 °C conforming to UL 60730-1
Ambient air temperature for storage	-40...85 °C
Relative humidity	10...90 % non-condensing
IP degree of protection	IP20
Pollution degree	2


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	457 g
Package 1 Height	13 cm
Package 1 width	9.1 cm
Package 1 Length	18.5 cm
Unit Type of Package 2	S02
Number of Units in Package 2	6
Package 2 Weight	3.036 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions

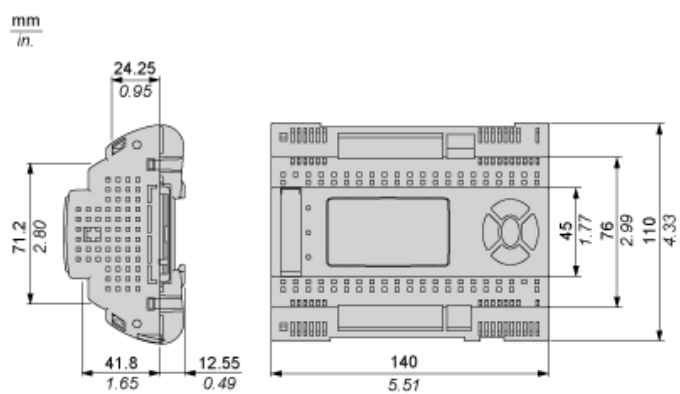


Mounting and Clearance

Clearance

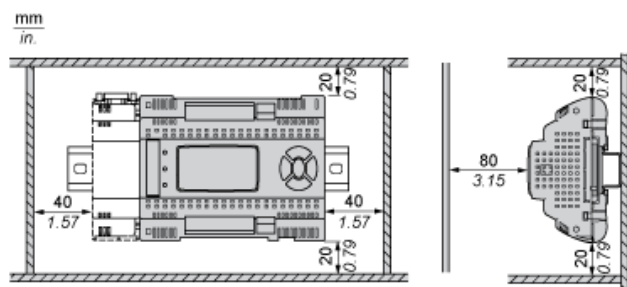


Misplacement




Power Supply



Digital Inputs

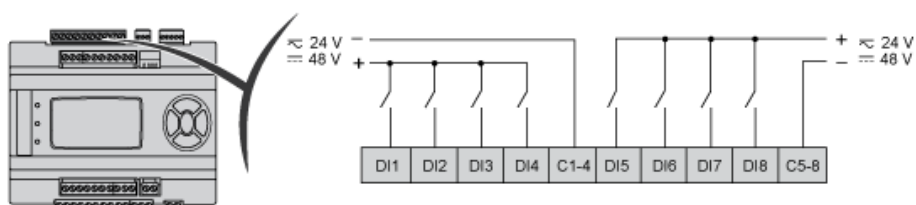


Analog Inputs

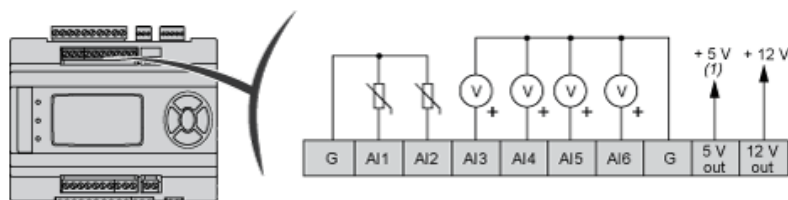


(1) Max current: 50 mA.
G : Ground

Analog Outputs

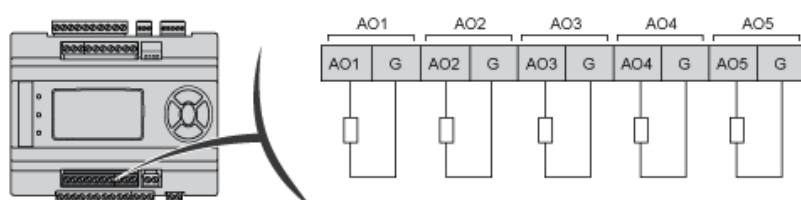

Digital Outputs

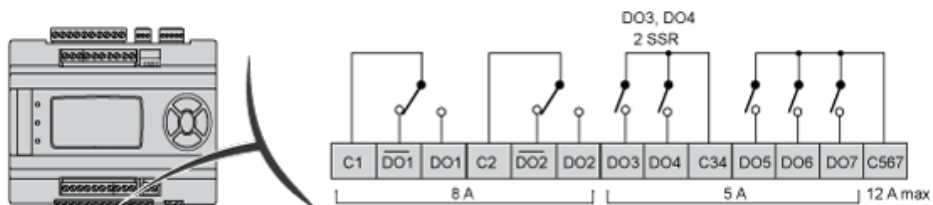

C : common

Fast Digital Input




Serial Line Port (RS 485)



Apply 120 Ohm terminal resistance


GS serial GND isolated from G

CAN Expansion Bus

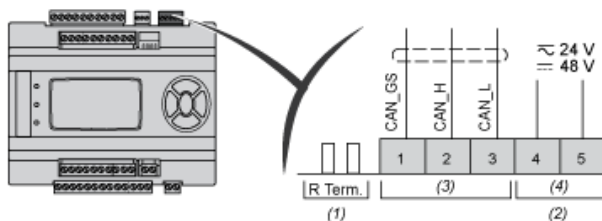


- (1) CAN terminal resistance
- (2) Output for remote keyboard
- (3) CANOPEN
- (4) Power Out

4 DipSwitches

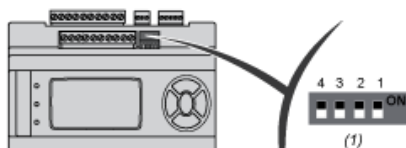

- (1) 4 DIP SWITCH
- LOW Address

6 - 10 DipSwitches

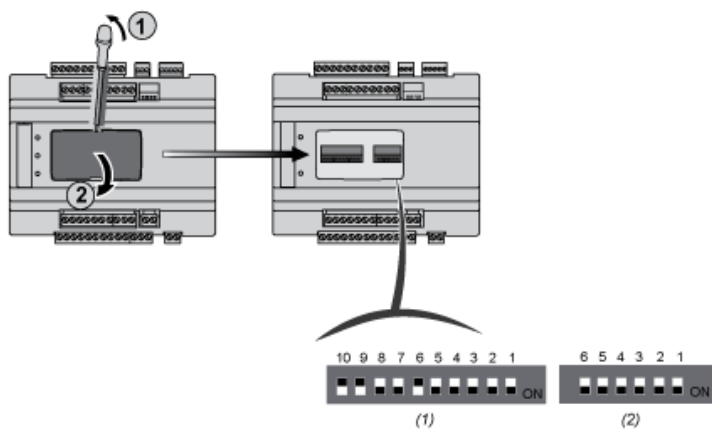

- (1) 10 DIP SWITCH
- (2) 6 DIP SWITCH