



Main

Range of product	Canalis
Product name	KS
Product or component type	Elbow
Busbar description	Standard on made to measure
Bar material	Aluminium
Device application	Change direction
[Ie] rated operational current	400 A at 35 °C
Direction change type	Direction 1: edgewise to right - Direction 1: edgewise to left -

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Operating angle	90...180 °
Mounting location	On trunking
Mounting position	Any position
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Width	147 mm
Depth	46 mm
Height	200...695 mm
Net weight	6.8 kg

Environment

Standards	IEC 60439-2 IEC 61439-6
-----------	----------------------------

Packing Units

Package 1 Weight	20.000 kg
Package 1 Height	1.650 dm
Package 1 width	7.260 dm
Package 1 Length	7.260 dm


Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months
----------	-----------

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

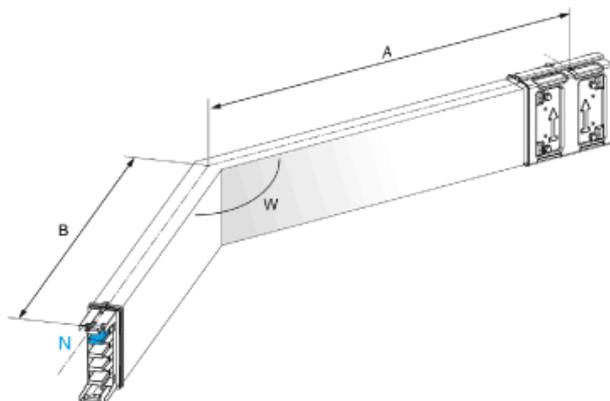

Dimensions

KSA400DLC4B

A (mm)	200 to 695
B (mm)	200 to 695
C (mm)	-
D (mm)	-
Fire barrier	No
Fire barrier position	-