



### Main

Range of product	Canalis
Product name	KS
Product or component type	Elbow
Busbar description	Standard on made to measure
Bar material	Aluminium
Device application	Change direction
[Ie] rated operational current	800 A at 35 °C
Direction change type	Direction 1: edgewise to right - Direction 1: edgewise to left -

### Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Operating angle	90...180 °
Mounting location	On trunking
Mounting position	Any position
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Width	146 mm
Depth	111 mm
Height	290...785 mm
Net weight	14.4 kg

### Environment

Standards	IEC 61439-6 IEC 60439-2
-----------	----------------------------

### Packing Units


Package 1 Weight	17.500 kg
Package 1 Height	1.670 dm
Package 1 width	8.450 dm
Package 1 Length	8.450 dm

### Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

### Contractual warranty

Warranty	18 months
----------	-----------

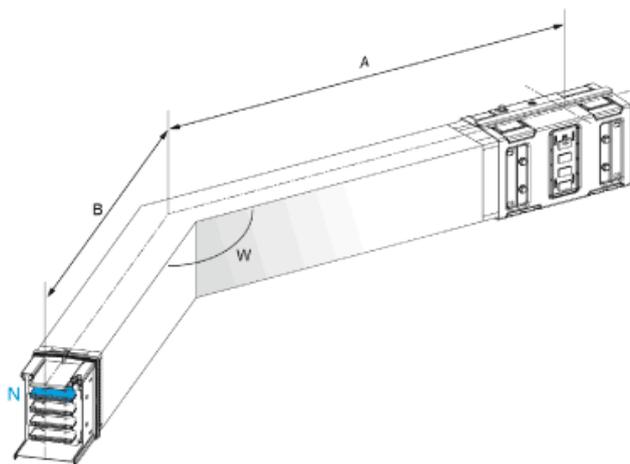

Dimensions	KSA1000DLC4B
A (mm)	290 to 785
B (mm)	290 to 785
C (mm)	-
D (mm)	-
Fire barrier	No
Fire barrier position	-