

Main

Range of product	Canalis
Product name	KS
Product or component type	Elbow
Busbar description	Standard on made to measure
Bar material	Aluminium
Device application	Change direction
[Ie] rated operational current	100 A at 35 °C
Direction change type	Direction 1: edgewise to right - Direction 1: edgewise to left -

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Operating angle	90...180 °
Mounting location	On trunking
Mounting position	Any position
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Width	147 mm
Depth	46 mm
Height	200...695 mm
Net weight	4 kg

Environment


Standards	IEC 61439-6 IEC 60439-2
-----------	----------------------------


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	18 kg
Package 1 Height	16.5 cm
Package 1 width	72.6 cm
Package 1 Length	72.6 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Environmental Disclosure	 Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product
Contractual warranty	
Warranty	18 months

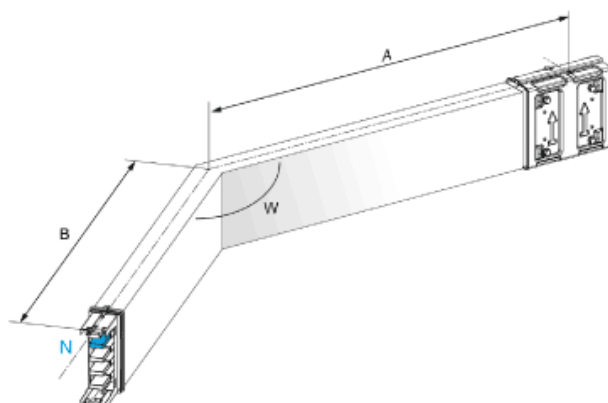

Dimensions

KSA250DLC4B

A (mm)	200 to 695
B (mm)	200 to 695
C (mm)	-
D (mm)	-
Fire barrier	No
Fire barrier position	-