

### Main

Range of product	Canalis
Product name	KS
Product or component type	Elbow
Busbar description	Standard on made to measure
Bar material	Aluminium
Device application	Change direction
[Ie] rated operational current	500 A at 35 °C
Direction change type	Direction 1: edgewise to right - Direction 1: edgewise to left -

### Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Operating angle	90...180 °
Mounting location	On trunking
Mounting position	Any position
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Width	146 mm
Depth	111 mm
Height	290...785 mm
Net weight	12.2 kg

### Environment

Standards	IEC 60439-2 IEC 61439-6
-----------	----------------------------

### Packing Units

Package 1 Weight	17.000 kg
Package 1 Height	1.670 dm
Package 1 width	8.450 dm
Package 1 Length	8.450 dm


### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

### Contractual warranty

Warranty	18 months
----------	-----------

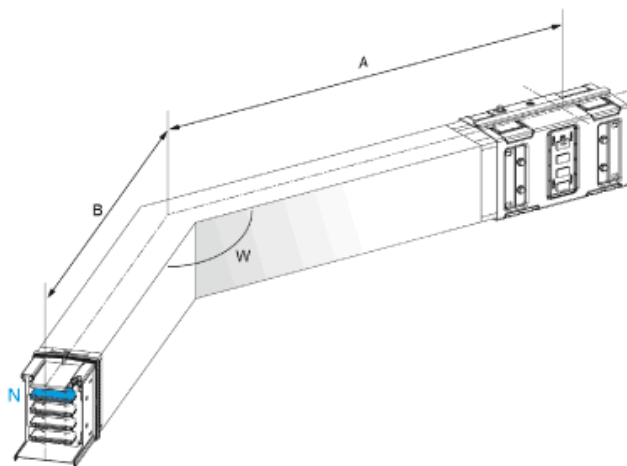

Dimensions		KSA630DLC4B
------------	--	-------------

A (mm)	290 to 785
B (mm)	290 to 785
C (mm)	-
D (mm)	-
Fire barrier	No
Fire barrier position	-