

### Main

|                                |                                 |
|--------------------------------|---------------------------------|
| Range of product               | Canalis                         |
| Product name                   | KS                              |
| Offer type                     | Standard                        |
| Product or component type      | Elbow                           |
| Busbar description             | Fire barrier on made to measure |
| Bar material                   | Aluminium                       |
| Device application             | Change direction                |
| [Ie] rated operational current | 500 A at 35 °C                  |
| Direction change type          | Direction 1: flat               |

### Complementary

|                                |                            |
|--------------------------------|----------------------------|
| [Ue] rated operational voltage | 230...690 V                |
| Network frequency              | 50/60 Hz                   |
| Operating angle                | 90 °                       |
| Mounting location              | On trunking                |
| Mounting position              | Any position               |
| Electrical connection          | Lubricated sliding contact |
| Mounting mode                  | By screws                  |
| Width                          | 146 mm                     |
| Depth                          | 111 mm                     |
| Height                         | 290...785 mm               |
| Net weight                     | 18 kg                      |




### Environment

|           |                            |
|-----------|----------------------------|
| Standards | IEC 61439-6<br>IEC 60439-2 |
|-----------|----------------------------|

### Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type of Package 1       | PCE     |
| Number of Units in Package 1 | 1       |
| Package 1 Weight             | 11 kg   |
| Package 1 Height             | 12 cm   |
| Package 1 width              | 86.9 cm |
| Package 1 Length             | 98.4 cm |

### Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| REACH Regulation           |  <a href="#">REACH Declaration</a>             |
| REACH free of SVHC         | Yes   |
| EU RoHS Directive          | Compliant  <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes   |
| Mercury free               | Yes   |
| RoHS exemption information |  Yes   |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>        |

---

|                             |   |
|-----------------------------|---|
| Environmental Disclosure    | <a href="#">Product Environmental Profile</a>   |
| WEEE                        | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Halogen content performance | Halogen free product  |


---

### Contractual warranty

---

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

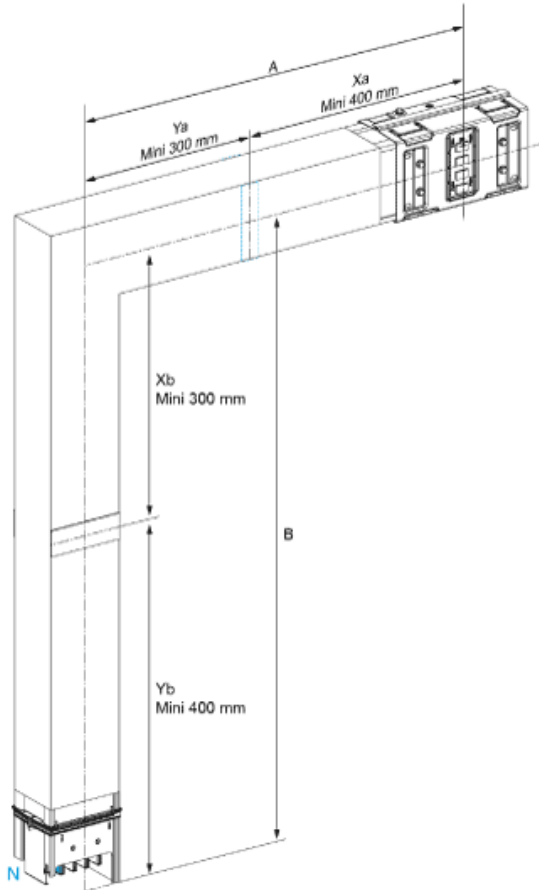

**Dimensions** KSA630DLF4CF

|                       |                       |
|-----------------------|-----------------------|
| A (mm)                | -                     |
| B (mm)                | -                     |
| C (mm)                | -                     |
| D (mm)                | -                     |
| Fire barrier          | Yes                   |
| Fire barrier position | Either on side A or B |