


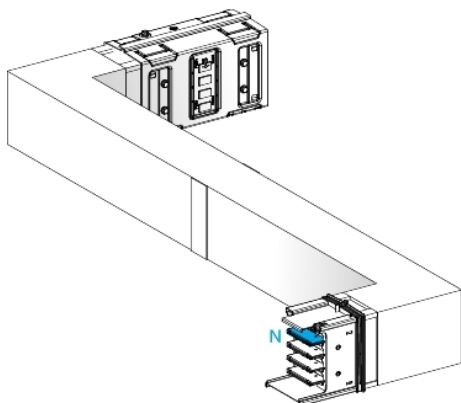

Main

Range of product	Canalis
Product name	KS
Product or component type	Zed elbow
Busbar description	Standard
Device application	Change direction
[Ie] rated operational current	800 A at 35 °C 1000 A at 35 °C
Direction change type	Direction 1: edgewise to right - neutral to up Direction 1: edgewise to left - neutral to up

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Dimension type	Made to measure
Operating angle	90 °
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Standards	IEC 60439-2 IEC 61439-6
Width	167 mm
Depth	117 mm
Length	Side 1: 290...785 mm Side 3: 290...785 mm
Colour	White (RAL 9001)
Net weight	24.2 kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262


Packing Units

Package 1 Weight	16.500 kg
Package 1 Height	1.670 dm
Package 1 width	9.200 dm
Package 1 Length	15.700 dm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes

China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product
Contractual warranty	
Warranty	18 months

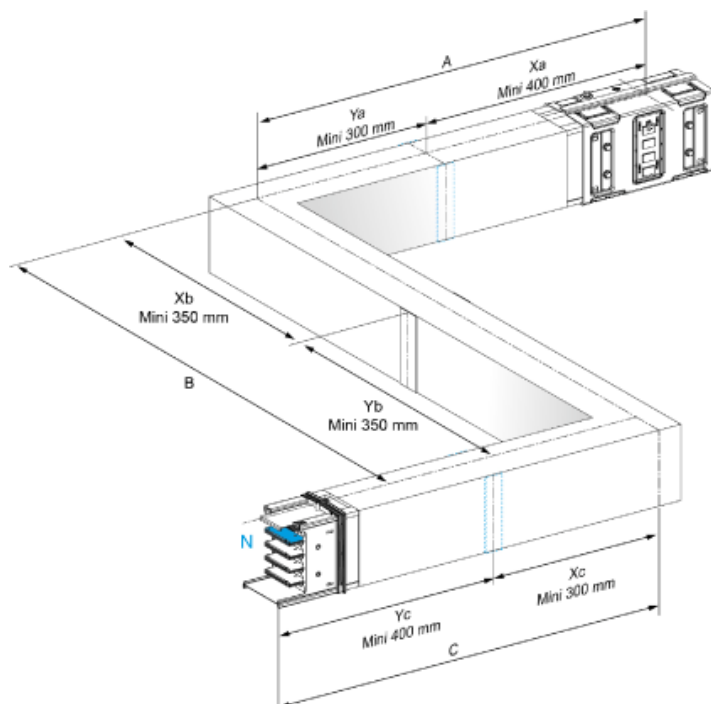

Dimensions

KSA1000DZCG4Cf

A (mm)	-
B (mm)	-
C (mm)	-
D (mm)	-
Fire barrier	Yes
Fire barrier position	Either on side A or B or C