

### Main

Range of product	Canalis
Product name	KS
Product or component type	Multiple elbow
Busbar description	Fire barrier
Device application	Change direction
[Ie] rated operational current	100 A at 35 °C 160 A at 35 °C 250 A at 35 °C
Direction change type	Direction 1: edgewise to downward - neutral to up Direction 3: flat to right - neutral to left

### Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Dimension type	Made to measure
Operating angle	90 °
Mounting mode	By screws
Electrical connection	Lubricated sliding contact
Standards	IEC 61439-6 IEC 60439-2
Width	147 mm
Length	Side 3: 250...695 mm Side 1: 250...745 mm
Colour	White (RAL 9001)
Net weight	8.4 kg

### Environment


IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	44 kg
Package 1 Height	77.5 cm
Package 1 width	92 cm
Package 1 Length	77.9 cm

### Contractual warranty

Warranty	18 months
----------	-----------

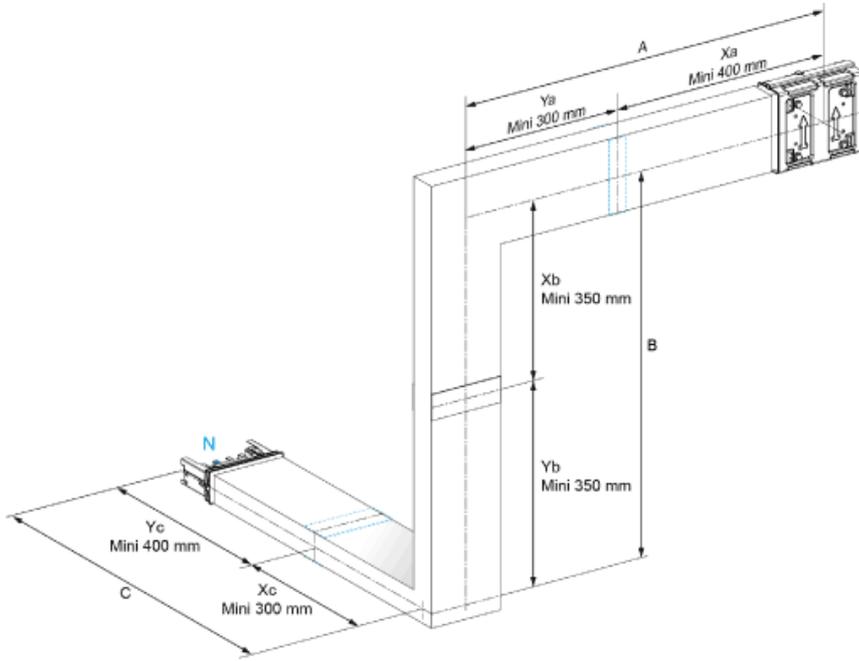

**Dimensions** KSA250DMBK4CF

A (mm)	-
B (mm)	-
C (mm)	-
D (mm)	-
Fire barrier	Yes
Fire barrier position	Either on side A or B or C